



**CLIMATEMASTER®**

A NIBE GROUP MEMBER



# Tranquility® 22 (TZ) Versatile Two Stage Series

Models TZH/V024 -060 60Hz - HFC 410A

The Tranquility® 22 (TZ) Versatile Two Stage Series offers high efficient two-stage operation in a simple cabinet design. The Tranquility® TZ offers many options for application flexibility.

Combined with one of the industry's smallest footprints for two-stage products, makes the Tranquility TZ suitable for installation in tight places and retrofit projects.

## Advantages of the High Efficiency TZ Series:

### Standard Features:

- All sizes 024 (2 ton) through 060 (5 tons) exceed ASHRAE 90.1 efficiencies
- Communicating DXM2.5 controls for reduced start-up, commissioning, and service time
- Part load operation significantly lowers annual operating costs
- Field convertible supply air arrangement (horizontal configurations only)
- Intelligent variable speed CV ECM fan motors for precise airflow control and soft start feature
- Eight safeties standard
- Non-corrosive polymer drain pan
- Sound absorbing glass fiber insulation
- Unique double isolation compressor mounting for quiet operation
- Copeland UltraTech™ two-stage scroll compressors

### Configurable Options:

- Internally mounted variable speed water pumps for geothermal and single pipe applications
- Internally mounted modulating water valves that vary water flow for maximized central pumping efficiency
- iGate 2 thermostats for remote monitoring, adjustments, and diagnostics via myUplink mobile app and website
- Industry leading Ultra-Quiet sound package
- MPC controls for interfacing with BACnet, Modbus, and N2 building management systems
- Extended range insulation for geothermal applications

# Tested To ASHRAE/AHRI/ISO 13256-1 English Units





Model	Water Loop Heat Pump				Ground Water Heat Pump				Ground Loop Heat Pump			
	Cooling 86°F		Heating 68°F		Cooling 59°F		Heating 50°F		Full Cool 77°F Part Cool 68°F		Full Heat 32°F Part Heat 41°F	
	Capacity Btuh	EER Btuh/W	Capacity Btuh	COP	Capacity Btuh	EER Btuh/W	Capacity Btuh	COP	Capacity Btuh	EER Btuh/W	Capacity Btuh	COP
TZ*024 Part	18,100	16.1	20,600	5.2	20,300	27.2	16,700	4.4	19,400	22.2	14,700	4.0
TZ*024 Full	23,700	14.3	28,000	4.6	26,500	21.7	23,000	4.1	24,600	16.0	17,800	3.6
TZ*030 Part	21,900	15.2	26,300	5.0	24,900	24.8	22,000	4.3	24,200	20.9	19,400	3.9
TZ*030 Full	28,500	14.0	35,800	4.6	32,300	20.7	30,000	4.2	29,900	15.7	23,800	3.6
TZ*036 Part	25,800	17.2	29,900	5.3	29,000	29.4	24,900	4.6	27,300	23.4	21,500	4.0
TZ*036 Full	34,300	15.1	42,000	4.6	38,200	22.3	35,100	4.3	35,200	16.7	27,300	3.6
TZ*042 Part	31,000	15.8	36,800	5.1	35,200	26.4	30,500	4.3	34,000	22.0	26,900	3.8
TZ*042 Full	41,100	14.3	50,200	4.6	46,300	21.3	42,300	4.1	43,100	16.1	33,300	3.4
TZ*048 Part	34,100	15.2	39,500	5.5	39,200	26.8	32,600	4.6	37,600	21.2	29,200	4.1
TZ*048 Full	45,900	14.0	53,800	4.9	51,800	20.9	45,000	4.4	48,100	15.5	35,600	3.7
TZ*060 Part	45,500	17.7	49,000	5.3	50,400	28.9	39,800	4.5	48,600	23.7	34,800	4.0
TZ*060 Full	61,700	15.7	67,500	4.8	68,000	22.7	55,400	4.3	63,200	17.3	43,700	3.6

Cooling capacities based upon 80.6°F DB, 66.2°F WB entering air temperature  
 Heating capacities based upon 68°F DB, 59°F WB entering air temperature  
 All rating based upon operation at lower voltage of dual voltage rated models

## Unit Size

Vertical Upflow Model	A Width	B Depth	C Height
024 - 030	in. 22.4	22.4	40.0
036 - 042	in. 22.4	25.4	45.0
048 - 060	in. 25.4	29.1	50.5

Horizontal Model	A Width	B Length	C Height
024 - 030	in. 22.4	48.3	18.3
036 - 042	in. 22.4	53.1	21.0
048 - 060	in. 25.4	68.0	21.0

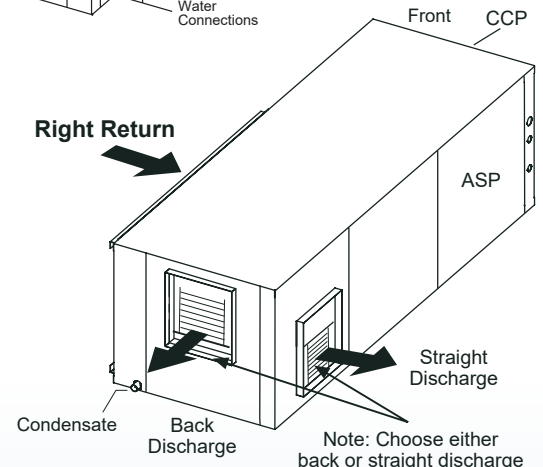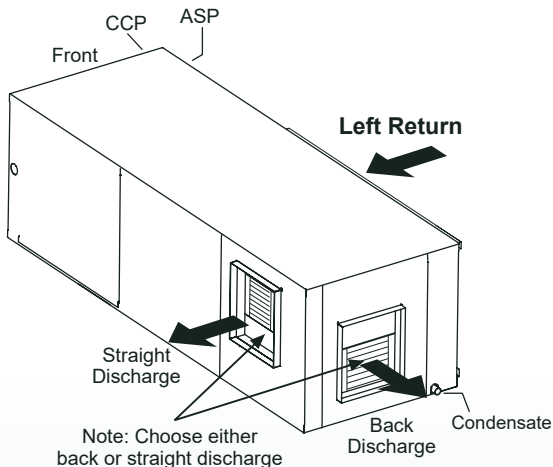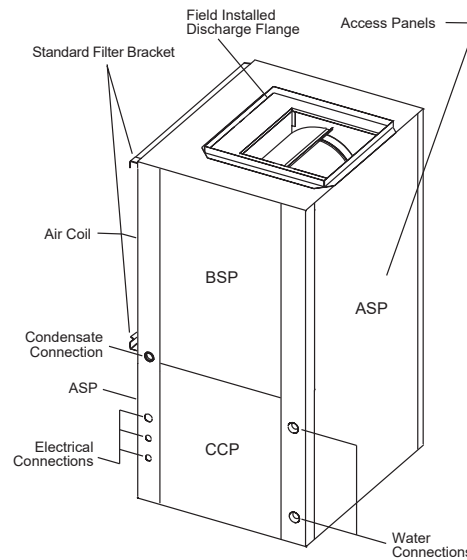

**Legend:**  
 CCP = Control/Compressor Access Panel  
 BSP = Blower Service Panel  
 ASP = Additional Service Panel (optional access)



7300 S.W. 44th Street  
 Oklahoma City, OK 73179  
 Phone: 405-745-6000  
[climatemaster.com](http://climatemaster.com)



LC1041  
 Rev.: 01/24/23

ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateMaster's Customer Service Department at 1-405-745-6000 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products. The latest version of this document is available at [climatemaster.com](http://climatemaster.com).  
 © ClimateMaster, Inc. All rights reserved 2017