

# Genesis Standard (GR) Series Submittal Data

Models GRH/V 006 - 060  
60Hz - R22

English Language/I-P Units



Rev.: 26 May, 2009B



## SUBMITTAL DATA - I-P UNITS

Unit Designation: \_\_\_\_\_

Job Name: \_\_\_\_\_

Architect: \_\_\_\_\_

Engineer: \_\_\_\_\_

Contractor: \_\_\_\_\_

## PERFORMANCE DATA

Cooling Capacity: \_\_\_\_\_ Btuh

EER: \_\_\_\_\_

Heating Capacity: \_\_\_\_\_ Btuh

COP: \_\_\_\_\_

Ambient Air Temp: \_\_\_\_\_ °F

Entering Water Temp (Clg): \_\_\_\_\_ °F

Entering Air Temp (Clg): \_\_\_\_\_ °F

Entering Water Temp (Htg): \_\_\_\_\_ °F

Entering Air Temp (Htg): \_\_\_\_\_ °F

Airflow: \_\_\_\_\_ CFM

Fan Speed or Motor/RPM/Turns: \_\_\_\_\_

Operating Weight: \_\_\_\_\_ (lb)

## ELECTRICAL DATA

Power Supply: \_\_\_\_\_ Volts      Phase: \_\_\_\_\_ Hz

Minimum Circuit Ampacity: \_\_\_\_\_

Maximum Overcurrent Protection: \_\_\_\_\_

ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateMaster's Customer Service Department at 1-405-745-6000 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products. The latest version of this document is available at [climatemaster.com](http://climatemaster.com).



LC208

Rev.: 26 May, 2009B

# Genesis Standard (GR) Series Submittal Data

Models GRH/V 006 - 060  
60Hz - R22

English Language/S-I Units



Rev.: 26 May, 2009B



## SUBMITTAL DATA - S-I UNITS

Unit Designation: \_\_\_\_\_

Job Name: \_\_\_\_\_

Architect: \_\_\_\_\_

Engineer: \_\_\_\_\_

Contractor: \_\_\_\_\_

## PERFORMANCE DATA

Cooling Capacity: \_\_\_\_\_ kW

EER: \_\_\_\_\_

Heating Capacity: \_\_\_\_\_ kW

COP: \_\_\_\_\_

Ambient Air Temp: \_\_\_\_\_ °C

Entering Water Temp (Clg): \_\_\_\_\_ °C

Entering Air Temp (Clg): \_\_\_\_\_ °C

Entering Water Temp (Htg): \_\_\_\_\_ °C

Entering Air Temp (Htg): \_\_\_\_\_ °C

Airflow: \_\_\_\_\_ l/s

Fan Speed or Motor/RPM/Turns: \_\_\_\_\_

Operating Weight: \_\_\_\_\_ (kg)

## ELECTRICAL DATA

Power Supply: \_\_\_\_\_ Volts      Phase: \_\_\_\_\_ Hz

Minimum Circuit Ampacity: \_\_\_\_\_

Maximum Overcurrent Protection: \_\_\_\_\_

ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateMaster's Customer Service Department at 1-405-745-6000 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products. The latest version of this document is available at [climatemaster.com](http://climatemaster.com).



LC208

Rev.: 26 May, 2009B

## Table of Contents

	*Page Number
Unit Features	4
Selection Procedure	5-6
GR Series Nomenclature	7
Performance Data - ARI/ASHRAE/ISO 13256-1	8
Performance Data Selection Notes	9
Performance Data - GRH006	10
Performance Data - GR H/V 009	11
Performance Data - GR H/V 012	12
Performance Data - GR H/V 015	13
Performance Data - GR H/V 019	14
Performance Data - GR H/V 024	15
Performance Data - GR H/V 030	16
Performance Data - GR H/V 036	17
Performance Data - GR H/V 042	18
Performance Data - GR H/V 048	19
Performance Data - GR H/V 060	20
Performance Data Correction Tables	21
Blower Performance Data	22
Physical Data	23
GR - Horizontal Dimensional Data	24 & 25
GR - Vertical Upflow Dimensional Data	26 & 27
Corner Weights for GRH Series Units	28
Electrical Data	29
GR Series Wiring Diagram Matrix	30
Typical Wiring Diagram Single Phase GR Units With CXM Controller	31
Typical Wiring Diagram Single Phase GR Units With DXM Controller	32
Typical Wiring Diagram Three Phase 208/230V GR Units With CXM Controller	33
Typical Wiring Diagram Three Phase 208/230V GR Units With DXM Controller	34
Typical Wiring Diagram Three Phase 460/575V GR Units With CXM Controller	35
Typical Wiring Diagram Three Phase 460/575V GR Units With DXM Controller	36
Typical Wiring Diagram Three Phase 460/575V GR Units With CXM & LON Controller	37
Typical Wiring Diagram Three Phase 460/575V GR Units With DXM & LON Controller	38
Typical Wiring Diagram Three Phase 460/575V GR Units With CXM & MPC Controller	39
Typical Wiring Diagram Three Phase 460/575V GR Units With DXM & MPC Controller	40
Genesis Standard (GR) Series 60Hz Engineering Specifications	41
Revision History	48

\*Document page number is shown next to part number (e.g. LC208 - 3 = page 3). Since not all pages are typically used in the submittals process, the page number in the lower right corner can still be used (page \_\_\_\_ of \_\_\_\_).

ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateMaster's Customer Service Department at 1-405-745-6000 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products. The latest version of this document is available at [climatemaster.com](http://climatemaster.com).



## THE GENESIS STANDARD (GR) SERIES

The GR series offers high efficiency, quiet operation with advanced features and application flexibility at competitive prices. GR series exceeds ASHRAE 90.1 efficiencies, yet maintains small cabinet dimensions.

Available in sizes 1/2 ton (1.76 kW) through 5 tons (17.6 kW) with multiple vertical and horizontal cabinet options the GR series offers a wide range of units for most any installation. The GR has an extended range refrigerant circuit, capable of ground loop (geothermal) applications as well as water loop (boiler-tower) applications. Standard features are many. Microprocessor controls, galvanized steel cabinet, polyester powder coat paint (vertical units) and TXV refrigerant metering device are just some of the features of the flexible GR series.

ClimateMaster's exclusive double isolation compressor mounting system makes the GR series the quietest unit on the market. Compressors are mounted on vibration isolation springs to a heavy gauge mounting plate, which is then isolated from the cabinet base with rubber grommets for maximized vibration/sound attenuation. Options such as e-coated air coil, DDC controls, internal pump and factory-installed water solenoid valves allow customized design solutions.

The GR Series water-source heat pumps are designed to meet the challenges of today's HVAC demands with a low cost/high value solution.

## UNIT FEATURES

- Sizes 006 (1/2 ton, 1.76 kW) through 060 (5 tons, 17.6 kW)
- Rotary, reciprocating and scroll compressors
- Exceeds ASHRAE 90.1 efficiencies
- Galvanized steel construction with polyester powder coat paint (vertical units)
- Unique double isolation compressor mounting with vibration isolation springs for quiet operation
- Insulated divider and separate compressor/air handler compartments
- TXV metering device
- Extended range (20 to 120°F, -6.7 to 48.9°C) operation
- Microprocessor controls standard (optional DXM and/or DDC controls)
- LonWorks, BACnet, Modbus and Johnson N2 compatibility options for DDC controls
- Field convertible discharge air arrangement for horizontal units
- Factory-mounted hanger brackets for horizontal units
- Internally trapped condensate drain line (vertical units only)
- Flush securely-mounted corner post water connections (no backup wrench required)
- Unit Performance Sentinel performance monitoring system
- Eight Safeties Standard
- Wide variety of options including e-coated air coils and internal pumps

## Selection Procedure

### Reference Calculations

Heating	Cooling
$LWT = EWT - \frac{HE}{GPM \times 500}$	$LWT = EWT + \frac{HR}{GPM \times 500}$
$LAT = EAT + \frac{HC}{CFM \times 1.08}$	$LC = TC - SC$ $LAT (DB) = EAT (DB) - \frac{SC}{CFM \times 1.08}$ $S/T = \frac{SC}{TC}$

### Legend and Glossary of Abbreviations

BTUH = BTU( British Thermal Unit) per hour

CFM = airflow, cubic feet/minute

COP = coefficient of performance = BTUH output/BTUH input

DB = dry bulb temperature (°F)

EAT = entering air temperature, Fahrenheit (dry bulb/wet bulb)

EER = energy efficiency ratio = BTUH output/Watt input

EPT = external pipe thread

ESP = external static pressure (inches w.g.)

EWT = entering water temperature

GPM = water flow in U.S. gallons/minute

HE = total heat of extraction, BTUH

HC = air heating capacity, BTUH

HR = total heat of rejection, BTUH

HWC = hot water generator (desuperheater) capacity, Mbtuh

IPT = internal pipe thread

KW = total power unit input, kilowatts

LAT = leaving air temperature, °F

LC = latent cooling capacity, BTUH

LWT = leaving water temperature, °F

MBTUH = 1000 BTU per hour

S/T = sensible to total cooling ratio

SC = sensible cooling capacity, BTUH

TC = total cooling capacity, BTUH

WB = wet bulb temperature (°F)

WPD = waterside pressure drop (psi & ft. of hd.)

### Conversion Table - to convert inch-pound (English) to SI (Metric)

Air Flow	Water Flow	Ext Static Pressure	Water Pressure Drop
Airflow (L/s) = CFM x 0.472	Water Flow (L/s) = gpm x 0.0631	ESP (Pa) = ESP (in of wg) x 249	PD (kPa) = PD (ft of hd) x 2.99



## Selection Procedure

- Step 1 Determine the actual heating and cooling loads at the desired dry bulb and wet bulb conditions.
- Step 2 Obtain the following design parameters: Entering water temperature, water flow rate in GPM, air flow in CFM, water flow pressure drop and design wet and dry bulb temperatures. Air flow CFM should be between 300 and 450 CFM per ton. Unit water pressure drop should be kept as close as possible to each other to make water balancing easier. Go to the appropriate tables and find the proper indicated water flow and water temperature.
- Step 3 Select a unit based on total and sensible cooling conditions. Select a unit which is closest to, but no larger than, the actual cooling load.
- Step 4 Enter tables at the design water flow and water temperature. Read the total and sensible cooling capacities (Note: interpolation is permissible, extrapolation is not).
- Step 5 Read the heating capacity. If it exceeds the design criteria it is acceptable. It is quite normal for Water-Source Heat Pumps to be selected on cooling capacity only since the heating output is usually greater than the cooling capacity.
- Step 6 Determine the correction factors associated with the variable factors of dry bulb and wet bulb.
 

Corrected Total Cooling =  
tabulated total cooling x wet bulb correction.  
Corrected Sensible Cooling =  
tabulated sensible cooling x wet/dry bulb correction.
- Step 7 Compare the corrected capacities to the load requirements. Normally if the capacities are within 10% of the loads, the equipment is acceptable. It is better to undersize than oversize, as undersizing improves humidity control, reduces sound levels and extends the life of the equipment.
- Step 8 When completed, calculate water temperature rise and assess the selection. If the units selected are not within 10% of the load calculations, then review what effect changing the GPM, water temperature and/or air flow and air temperature would have on the corrected capacities. If the desired capacity cannot be achieved, select the next larger or smaller unit and repeat the procedure. Remember, when in doubt, undersize slightly for best performance.

## Example Equipment Selection For Cooling

### Step 1 Load Determination:

Assume we have determined that the appropriate cooling load at the desired dry bulb 80°F and wet bulb 65°F conditions is as follows:

Total Cooling .....	21,100 BTUH
Sensible Cooling.....	15,900 BTUH
Entering Air Temp ... 80°F Dry Bulb / 65°F Wet Bulb	

### Step 2 Design Conditions:

Similarly, we have also obtained the following design parameters:

Entering Water Temp .....	90°F
Water Flow (Based upon 12°F rise in temp.)	4.5 GPM
Air Flow .....	700 CFM

### Step 3, 4 & 5 HP Selection:

After making our preliminary selection (GRH024), we enter the tables at design water flow and water temperature and read Total Cooling, Sens. Cooling and Heat of Rej. capacities:

Total Cooling .....	21,900 BTUH
Sensible Cooling.....	16,700 BTUH
Heat of Rejection .....	29,000 BTUH

### Step 6 & 7 Entering Air and Airflow Corrections:

Next, we determine our correction factors.


Table	Ent Air	Air Flow	Corrected
Corrected Total Cooling =	21,900	x 0.971	x 0.985 = 20,946
Corrected Sens Cooling =	16,700	x 1.070	x 0.938 = 16,761
Corrected Heat of Reject =	29,000	x 0.969	x 0.983 = 27,623

### Step 8 Water Temperature Rise Calculation & Assessment:

Actual Temperature Rise	12.3°F
-------------------------	--------

When we compare the Corrected Total Cooling and Corrected Sensible Cooling figures with our load requirements stated in Step 1, we discover that our selection is within +/- 10% of our sensible load requirement. Furthermore, we see that our Corrected Total Cooling figure is slightly undersized as recommended, when compared to the actual load.

## GR Series Nomenclature

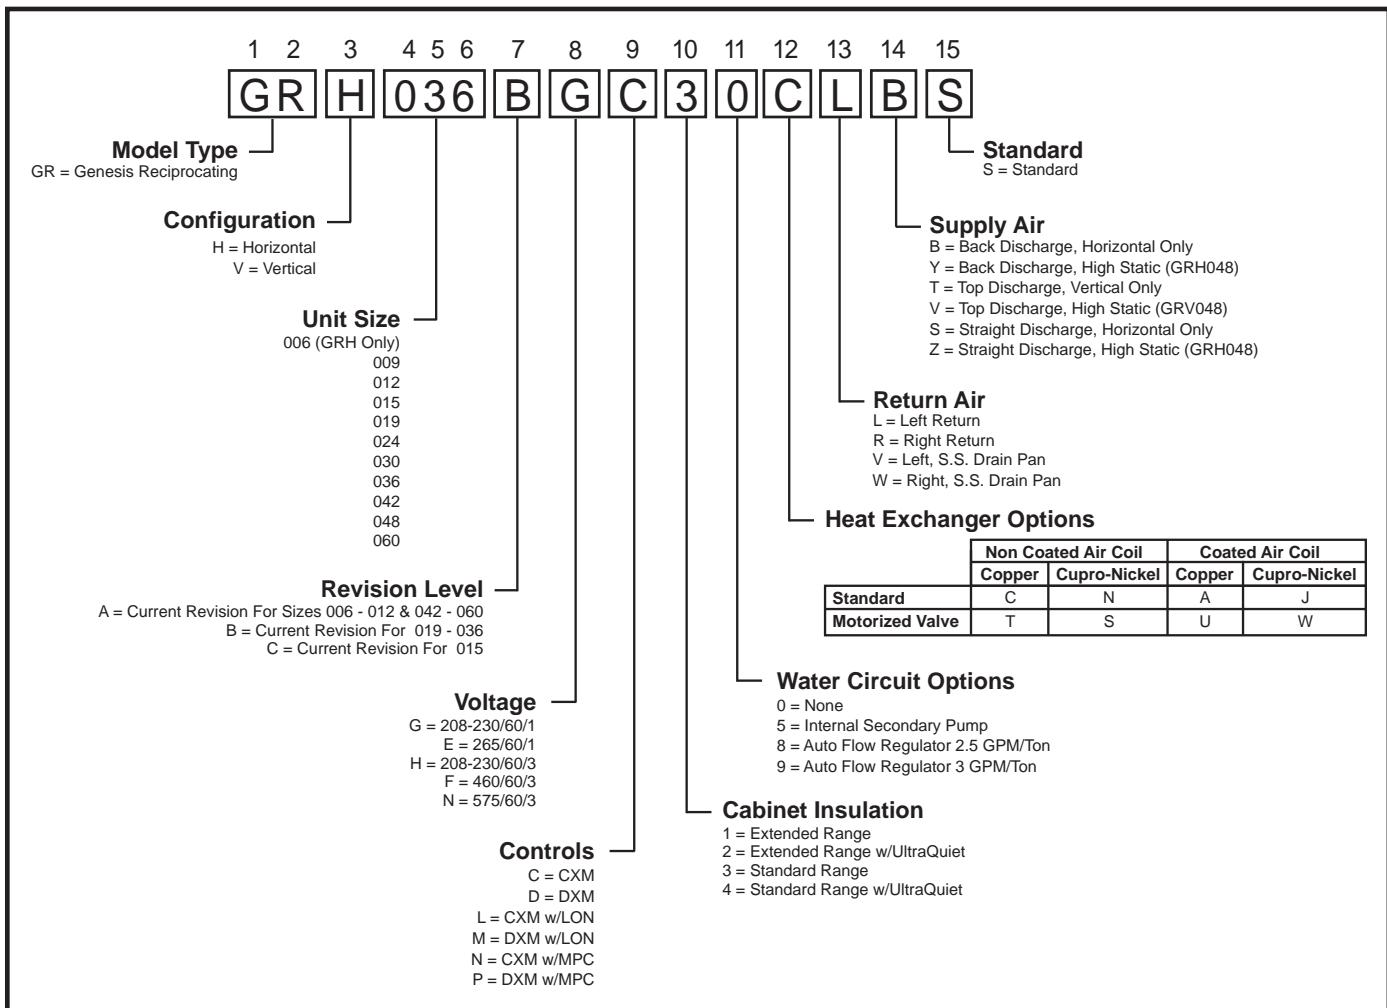

Rev.: 11/05/08B

# GR Series 60Hz - R22 Submittal Data Eng/I-P



## Performance Data

### ARI/ASHRAE/ISO 13256-1

ASHRAE/ARI/ISO 13256-1. English (IP) Units

Model	Water Loop Heat Pump				Ground Water Heat Pump				Ground Loop Heat Pump			
	Cooling 86°F		Heating 68°F		Cooling 59°F		Heating 50°F		Cooling 77°F		Heating 32°F	
	Capacity Btuh	EER Btuh/W	Capacity Btuh	COP	Capacity Btuh	EER Btuh/W	Capacity Btuh	COP	Capacity Btuh	EER Btuh/W	Capacity Btuh	COP
GRH006	5,400	12.8	7,400	4.2	5,900	17.6	5,500	3.8	5,600	14.3	4,400	3.4
GRH/V009	8,100	12.8	10,300	4.3	8,800	17.6	7,700	3.8	8,300	14.2	6,200	3.4
GRH/V012	11,800	12.7	14,600	4.2	12,500	17.6	11,000	3.6	12,100	14.2	8,700	3.4
GRH/V015	14,100	13.3	16,800	4.6	15,200	17.6	13,500	4.1	14,500	14.8	10,700	3.5
GRH/V019	18,900	12.5	22,500	4.2	20,100	17.6	16,700	3.6	19,100	13.4	11,800	3.2
GRH/V024	23,000	12.3	27,600	4.2	26,100	18.2	21,300	3.7	23,000	13.3	16,700	3.3
GRH/V030	28,500	13.2	33,300	4.4	31,100	18.3	27,000	3.9	28,700	14.4	20,100	3.4
GRH/V036	34,000	13.0	41,700	4.2	37,500	18.2	33,400	3.9	35,200	14.7	25,500	3.4
GRH/V042	40,000	13.0	46,700	4.3	46,500	18.6	38,300	3.9	42,000	15.0	29,400	3.4
GRH/V048	47,000	12.8	58,000	4.2	54,000	18.1	46,000	3.8	48,500	14.3	35,300	3.3
GRH/V060	59,000	12.8	68,000	4.2	64,500	16.8	56,000	3.8	60,600	14.1	44,000	3.2

Cooling capacities based upon 80.6°F DB, 66.2°F WB entering air temperature

Heating capacities based upon 68°F DB, 59°F WB entering air temperature

All air flow is rated on high speed

All ratings based upon operation at lower voltage of dual voltage rated models

ASHRAE/ARI/ISO 13256-1. Metric (SI) Units

Model	Water Loop Heat Pump				Ground Water Heat Pump				Ground Loop Heat Pump			
	Cooling 30°C		Heating 20°C		Cooling 15°C		Heating 10°C		Cooling 25°C		Heating 0°C	
	Capacity Watts	EER W/W	Capacity Watts	COP	Capacity Watts	EER W/W	Capacity Watts	COP	Capacity Watts	EER W/W	Capacity Watts	COP
GRH006	1,583	3.8	2,169	4.2	1,729	5.2	1,612	3.8	1,641	4.2	1,290	3.4
GRH/V009	2,374	3.8	3,019	4.3	2,579	5.2	2,257	3.8	2,433	4.2	1,817	3.4
GRH/V012	3,458	3.7	4,279	4.2	3,664	5.2	3,224	3.6	3,546	4.2	2,550	3.4
GRH/V015	4,131	3.9	4,982	4.6	4,454	5.2	3,956	4.1	4,249	4.3	3,135	3.5
GRH/V019	5,539	3.7	6,594	4.2	5,891	5.2	4,894	3.6	5,598	3.9	3,458	3.2
GRH/V024	6,741	3.6	8,089	4.2	7,649	5.3	6,243	3.7	6,741	3.9	4,894	3.3
GRH/V030	8,353	3.9	9,760	4.4	9,115	5.4	7,913	3.9	8,411	4.2	5,891	3.4
GRH/V036	9,965	3.8	12,222	4.2	10,991	5.3	9,789	3.9	10,317	4.3	7,474	3.4
GRH/V042	11,720	3.8	13,687	4.3	13,628	5.4	11,225	3.9	12,309	4.4	8,617	3.4
GRH/V048	13,775	3.8	16,999	4.2	15,826	5.3	13,482	3.8	14,215	4.2	10,346	3.3
GRH/V060	17,292	3.8	19,930	4.2	18,904	4.9	16,413	3.8	17,761	4.1	12,896	3.2

Cooling capacities based upon 27°C DB, 19°C WB entering air temperature

Heating capacities based upon 20°C DB, 15°C WB entering air temperature

All air flow is rated on high speed

All ratings based upon operation at lower voltage of dual voltage rated models

ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateMaster's Customer Service Department at 1-405-745-6000 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products. The latest version of this document is available at [climatemaster.com](http://climatemaster.com).

## Performance Data Selection Notes

For operation in the shaded area when water is used in lieu of an anti-freeze solution, the LWT (Leaving Water Temperature) must be calculated. Flow must be maintained to a level such that the LWT is maintained above 42°F [5.6°C] when the JW3 jumper is not clipped (see example below). This is due to the potential of the refrigerant temperature being as low as 32°F [0°C] with 40°F [4.4°C] LWT, which may lead to a nuisance cutout due to the activation of the Low Temperature Protection. JW3 should never be clipped for standard range equipment or systems without antifreeze.

### Example:

At 50°F EWT (Entering Water Temperature) and 1.5 gpm/ton, a 3 ton unit has a HE of 22,500 Btuh. To calculate LWT, rearrange the formula for HE as follows:

HE = TD x GPM x 500, where HE = Heat of Extraction (Btuh); TD = temperature difference (EWT - LWT) and GPM = U.S. Gallons per Minute.

$$TD = HE / (GPM \times 500)$$

$$TD = 22,500 / (4.5 \times 500)$$

$$TD = 10^{\circ}\text{F}$$

$$LWT = EWT - TD$$

$$LWT = 50 - 10 = 40^{\circ}\text{F}$$

In this example, a higher flow rate will be required for EWTs at or below 50°F without antifreeze. At 2 gpm/ton, the calculation above results in a TD of 7.5. LWT = 50 - 7.5 = 42.5°F, which is above 42°F EWT, and is acceptable for this application.

**Heating - EAT 70°F**

EER	HC	kW	HE	LAT	COP
8.0	4.8	0.47	3.2	92.4	2.98
8.2	5.1	0.52	3.3	93.5	2.89
8.3	5.2	0.50	3.5	94.3	3.05
8.5	5.4	0.49	3.7	95.0	3.22
8.7	5.6	0.53	3.8	96.0	3.09
8.8	5.8	0.52	4.0	96.8	3.27
9.0	6.0	0.51	4.2	97.6	3.45
9.2	6.2	0.55	4.3	98.5	3.28
9.5	6.3	0.54	4.5	99.4	3.47
9.8	6.5	0.52	4.8	100.3	3.66
		0.57	4.8	101.0	

# GR Series 60Hz - R22 Submittal Data Eng/I-P



## Performance Data GRH006

200 CFM Nominal (Rated) Airflow

Performance capacities shown in thousands of Btuh

*WPD Adder for Motorized Valve, GRH006 (Cv = 4.9, MOPD = 150 psi)		EWT °F	GPM	*WPD		Cooling - EAT 80/67°F					Heating - EAT 70°F								
				PSI	FT	TC	SC	Sens/Tot Ratio	kW	HR	EER	HC	kW	HE	LAT	COP			
20	1.5	1.6	3.6	Operation Not Recommended					4.8	0.47	3.2	92.4	2.98						
GPM	WPD Adder	0.8	0.6	1.3	7.4	4.8	0.65	0.23	8.2	32.1	5.1	0.52	3.3	93.5	2.89				
		1.1	1.0	2.3	7.6	4.9	0.65	0.22	8.3	34.2	5.2	0.50	3.5	94.3	3.05				
		1.5	1.5	3.5	7.8	5.0	0.64	0.21	8.5	36.6	5.4	0.49	3.7	95.0	3.22				
0.8	0.03	0.06	1.1	0.05	0.12	0.8	0.6	1.3	7.1	4.7	0.65	0.29	8.1	24.2	5.6	0.53	3.8	96.0	3.09
						1.1	1.0	2.2	7.3	4.8	0.65	0.28	8.3	25.9	5.8	0.52	4.0	96.8	3.27
						1.5	1.5	3.4	7.5	4.8	0.65	0.27	8.4	27.7	6.0	0.51	4.2	97.6	3.45
1.1	0.05	0.12	1.5	0.09	0.22	0.8	0.5	1.3	6.9	4.5	0.66	0.36	8.1	19.2	6.2	0.55	4.3	98.5	3.28
						1.1	0.9	2.1	7.0	4.6	0.66	0.34	8.2	20.5	6.3	0.54	4.5	99.4	3.47
						1.5	1.4	3.3	7.2	4.7	0.65	0.33	8.3	21.9	6.5	0.52	4.8	100.3	3.66
1.5	0.09	0.22	20	0.8	0.5	0.8	0.5	1.2	6.6	4.4	0.66	0.42	8.0	15.7	6.7	0.57	4.8	101.0	3.46
						1.1	0.9	2.1	6.8	4.5	0.66	0.40	8.1	16.7	6.9	0.55	5.0	101.9	3.66
						1.5	1.4	3.2	6.9	4.5	0.66	0.39	8.2	17.9	7.1	0.54	5.3	102.9	3.86
20	0.8	0.03	0.06	1.1	0.05	0.8	0.5	1.2	6.3	4.2	0.67	0.48	8.0	13.1	7.2	0.58	5.2	103.4	3.63
						1.1	0.9	2.0	6.5	4.3	0.66	0.46	8.1	14.0	7.5	0.57	5.5	104.5	3.83
						1.5	1.3	3.1	6.6	4.4	0.66	0.44	8.2	14.9	7.7	0.56	5.8	105.6	4.05
20	1.1	0.05	0.12	1.5	0.09	0.8	0.5	1.1	6.1	4.1	0.67	0.55	7.9	11.1	7.8	0.60	5.7	105.9	3.79
						1.1	0.8	1.9	6.2	4.2	0.67	0.53	8.0	11.8	8.0	0.59	6.0	107.1	4.00
						1.5	1.3	3.0	6.4	4.2	0.67	0.50	8.1	12.6	8.2	0.57	6.3	108.2	4.23
20	1.5	0.09	0.22	20	0.8	0.8	0.5	1.1	5.8	3.9	0.68	0.61	7.9	9.5	8.3	0.62	6.2	108.4	3.94
						1.1	0.8	1.9	5.9	4.0	0.68	0.59	7.9	10.1	8.6	0.60	6.5	109.6	4.16
						1.5	1.3	2.9	6.1	4.1	0.67	0.56	8.0	10.8	8.8	0.59	6.8	110.8	4.40
20	20	0.8	0.03	0.06	1.1	0.8	0.5	1.1	5.5	3.8	0.69	0.67	7.8	8.2	Operation Not Recommended				
						1.1	0.8	1.8	5.7	3.9	0.68	0.65	7.9	8.7	Operation Not Recommended				
						1.5	1.2	2.8	5.8	3.9	0.68	0.62	7.9	9.3	Operation Not Recommended				
20	20	1.1	0.05	0.12	1.5	0.8	0.4	1.0	5.3	3.6	0.69	0.74	7.8	7.1	Operation Not Recommended				
						1.1	0.7	1.7	5.4	3.7	0.69	0.71	7.8	7.6	Operation Not Recommended				
						1.5	1.2	2.7	5.5	3.8	0.69	0.68	7.8	8.1	Operation Not Recommended				

Interpolation is permissible; extrapolation is not.

All entering air conditions are 80°F DB and 67°F WB in cooling, and 70°F DB in heating.

ARI/ISO certified conditions are 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.

Table does not reflect fan or pump power corrections for ARI/ISO conditions.

All performance is based upon the lower voltage of dual voltage rated units.

Performance stated is at the rated power supply; performance may vary as the power supply varies from the rated.

Operation below 40°F EWT is based upon a 15% antifreeze solution.

Operation below 60°F EWT requires optional insulated water/refrigerant circuit.

See performance correction tables for operating conditions other than those listed above.

See Performance Data Selection Notes for operation in the shaded areas.

**Performance Data**  
**GR H/V 009**

300 CFM Nominal (Rated) Airflow

Performance capacities shown in thousands of Btuh

*WPD Adder for Motorized Valve, GR H/V 009 (Cv = 4.9, MOPD = 150 psi)			EWT °F	GPM	*WPD		Cooling - EAT 80/67°F					Heating - EAT 70°F							
					PSI	FT	TC	SC	Sens/Tot Ratio	kW	HR	EER	HC	kW	HE	LAT	COP		
			20	2.2	3.6	8.3	Operation Not Recommended								5.5	0.63	3.4	87.0	2.57
GPM	WPD Adder		30	1.1	1.2	2.8	10.6	7.0	0.65	0.40	12.0	26.7	5.9	0.62	3.8	88.2	2.77		
	PSI	FT		1.7	2.4	5.6	10.9	7.1	0.65	0.38	12.2	28.5	6.2	0.64	4.0	89.2	2.84		
1.1	0.05	0.12	40	2.2	3.5	8.0	11.1	7.2	0.65	0.36	12.4	30.5	6.5	0.66	4.3	90.1	2.91		
1.7	0.12	0.28		1.1	1.2	2.7	10.1	6.8	0.67	0.47	11.7	21.7	6.8	0.65	4.6	91.0	3.06		
2.2	0.20	0.47		1.7	2.4	5.5	10.3	6.9	0.67	0.45	11.8	23.1	7.2	0.67	4.9	92.1	3.14		
			50	2.2	3.4	7.8	10.6	7.0	0.66	0.43	12.0	24.7	7.5	0.69	5.2	93.2	3.22		
				1.1	1.1	2.6	9.5	6.5	0.69	0.53	11.3	17.9	7.7	0.68	5.4	93.8	3.33		
				1.7	2.3	5.3	9.7	6.7	0.68	0.51	11.5	19.1	8.1	0.70	5.7	95.1	3.42		
			60	2.2	3.3	7.6	10.0	6.8	0.68	0.49	11.6	20.4	8.5	0.71	6.1	96.3	3.50		
				1.1	1.1	2.5	9.0	6.3	0.71	0.60	11.0	14.9	8.6	0.71	6.2	96.6	3.58		
				1.7	2.2	5.1	9.2	6.5	0.70	0.58	11.1	15.9	9.1	0.72	6.6	98.0	3.67		
			70	2.2	3.2	7.3	9.4	6.6	0.70	0.55	11.3	17.0	9.5	0.74	7.0	99.4	3.76		
				1.1	1.1	2.4	8.4	6.1	0.73	0.67	10.7	12.6	9.5	0.73	7.0	99.4	3.81		
				1.7	2.2	5.0	8.6	6.2	0.72	0.64	10.8	13.4	10.0	0.75	7.5	100.9	3.91		
			80	2.2	3.1	7.1	8.8	6.4	0.72	0.61	10.9	14.4	10.5	0.77	7.9	102.5	4.00		
				1.1	1.0	2.4	7.9	5.9	0.75	0.74	10.4	10.7	10.4	0.76	7.8	102.2	4.03		
				1.7	2.1	4.8	8.0	6.0	0.75	0.71	10.5	11.4	11.0	0.78	8.3	103.9	4.13		
			90	2.2	3.0	6.8	8.2	6.1	0.75	0.68	10.5	12.2	11.5	0.80	8.8	105.6	4.23		
				1.1	1.0	2.3	7.3	5.7	0.78	0.80	10.1	9.1	11.3	0.79	8.7	105.0	4.23		
				1.7	2.0	4.6	7.5	5.8	0.78	0.77	10.1	9.7	11.9	0.81	9.2	106.8	4.34		
			100	2.2	2.9	6.6	7.7	5.9	0.77	0.74	10.2	10.4	12.5	0.83	9.7	108.7	4.44		
				1.1	0.9	2.2	6.8	5.5	0.81	0.87	9.7	7.8	Operation Not Recommended						
				1.7	1.9	4.5	6.9	5.6	0.81	0.84	9.8	8.3							
				2.2	2.8	6.4	7.1	5.7	0.81	0.80	9.8	8.8							
			110	1.1	0.9	2.1	6.2	5.3	0.85	0.94	9.4	6.6							
				1.7	1.9	4.3	6.4	5.4	0.85	0.90	9.4	7.1							
				2.2	2.6	6.1	6.5	5.5	0.85	0.86	9.4	7.5							

Interpolation is permissible; extrapolation is not.

All entering air conditions are 80°F DB and 67°F WB in cooling, and 70°F DB in heating.

ARI/ISO certified conditions are 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.

Table does not reflect fan or pump power corrections for ARI/ISO conditions.

All performance is based upon the lower voltage of dual voltage rated units.

Performance stated is at the rated power supply; performance may vary as the power supply varies from the rated.

Operation below 40°F EWT is based upon a 15% antifreeze solution.

Operation below 60°F EWT requires optional insulated water/refrigerant circuit.

See performance correction tables for operating conditions other than those listed above.

See Performance Data Selection Notes for operation in the shaded areas.

# GR Series 60Hz - R22 Submittal Data Eng/I-P



## Performance Data GR H/V 012

375 CFM Nominal (Rated) Airflow

Performance capacities shown in thousands of Btuh

*WPD Adder for Motorized Valve, GR H/V 012 (Cv = 4.9, MOPD = 150 psi)		EWT °F	GPM	*WPD		Cooling - EAT 80/67°F					Heating - EAT 70°F						
				PSI	FT	TC	SC	Sens/ Tot Ratio	kW	HR	EER	HC	kW	HE	LAT	COP	
20	3.0	7.1	16.5	Operation Not Recommended					7.6	0.84	4.7	87.5	2.62				
GPM	WPD Adder		1.5	2.5	5.7	14.3	10.1	0.71	0.57	16.2	25.2	8.2	0.85	5.3	89.1	2.85	
	PSI	FT		2.3	4.9	11.2	14.6	10.3	0.70	0.54	16.5	26.9	8.7	0.87	5.7	90.1	2.92
1.5	0.09	0.22	30	3.0	6.9	16.0	15.0	10.5	0.70	0.52	16.8	28.7	9.1	0.89	6.1	91.1	2.99
2.3	0.22	0.51		1.5	2.4	5.6	13.8	9.8	0.71	0.65	16.0	21.2	9.6	0.89	6.6	92.3	3.17
3.0	0.37	0.87		2.3	4.7	10.9	14.1	10.0	0.71	0.63	16.3	22.6	10.1	0.92	7.0	93.5	3.25
			40	3.0	6.7	15.5	14.4	10.2	0.71	0.60	16.5	24.1	10.6	0.94	7.4	94.6	3.32
				1.5	2.3	5.4	13.3	9.6	0.72	0.74	15.8	18.0	11.0	0.94	7.8	95.6	3.45
				2.3	4.6	10.5	13.6	9.8	0.72	0.71	16.0	19.3	11.6	0.96	8.3	96.9	3.54
			50	3.0	6.5	15.0	13.9	10.0	0.72	0.68	16.2	20.6	12.2	0.99	8.8	98.2	3.62
				1.5	2.3	5.2	12.8	9.3	0.73	0.82	15.6	15.6	12.4	0.98	9.1	98.8	3.71
				2.3	4.4	10.2	13.1	9.5	0.73	0.79	15.8	16.6	13.1	1.01	9.7	100.3	3.81
			60	3.0	6.3	14.6	13.4	9.7	0.72	0.75	15.9	17.8	13.7	1.03	10.2	101.8	3.90
				1.5	2.2	5.0	12.3	9.1	0.74	0.90	15.3	13.6	13.8	1.03	10.3	102.0	3.95
				2.3	4.3	9.9	12.5	9.2	0.74	0.87	15.5	14.5	14.6	1.05	11.0	103.7	4.05
			70	3.0	6.1	14.1	12.8	9.4	0.73	0.83	15.7	15.5	15.3	1.08	11.6	105.4	4.14
				1.5	2.1	4.9	11.7	8.8	0.75	0.99	15.1	11.9	15.2	1.07	11.6	105.3	4.16
				2.3	4.1	9.5	12.0	9.0	0.75	0.95	15.3	12.7	16.0	1.10	12.3	107.1	4.27
			80	3.0	5.9	13.6	12.3	9.2	0.74	0.91	15.4	13.6	16.8	1.13	13.0	109.0	4.37
				1.5	2.0	4.7	11.2	8.6	0.76	1.07	14.9	10.5	16.6	1.12	12.8	108.5	4.36
				2.3	4.0	9.2	11.5	8.7	0.76	1.03	15.0	11.2	17.5	1.15	13.6	110.5	4.47
			90	3.0	5.7	13.1	11.8	8.9	0.76	0.98	15.1	12.0	18.4	1.18	14.4	112.5	4.58
				1.5	2.0	4.5	10.7	8.3	0.77	1.16	14.7	9.3					
				2.3	3.8	8.9	11.0	8.5	0.77	1.11	14.8	9.9					
			100	3.0	5.5	12.6	11.2	8.6	0.77	1.06	14.9	10.6					
				1.5	1.9	4.4	10.2	8.1	0.79	1.24	14.4	8.2					
				2.3	3.7	8.5	10.5	8.2	0.79	1.19	14.5	8.8					
			110	3.0	5.3	12.2	10.7	8.4	0.78	1.14	14.6	9.4	Operation Not Recommended				

Interpolation is permissible; extrapolation is not.

All entering air conditions are 80°F DB and 67°F WB in cooling, and 70°F DB in heating.

ARI/ISO certified conditions are 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.

Table does not reflect fan or pump power corrections for ARI/ISO conditions.

All performance is based upon the lower voltage of dual voltage rated units.

Performance stated is at the rated power supply; performance may vary as the power supply varies from the rated.

Operation below 40°F EWT is based upon a 15% antifreeze solution.

Operation below 60°F EWT requires optional insulated water/refrigerant circuit.

See performance correction tables for operating conditions other than those listed above.

See Performance Data Selection Notes for operation in the shaded areas.

**Performance Data**  
**GR H/V 015**

500 CFM Nominal (Rated) Airflow

Performance capacities shown in thousands of Btu/h

*WPD Adder for Motorized Valve, GR H/V 015 (Cv = 4.9, MOPD = 150 psi)			EWT °F	GPM	WPD		Cooling - EAT 80/67°F					Heating - EAT 70°F						
					PSI	FT	TC	SC	Sens/Tot Ratio	kW	HR	EER	HC	kW	HE	LAT	COP	
			20	3.5	2.7	6.3	Operation Not Recommended					9.3	0.84	6.4	87.2	3.24		
GPM	WPD Adder		30	1.8	0.8	1.9	16.1	11.8	0.74	0.57	18.0	28.5	10.0	0.86	7.1	88.5	3.42	
	PSI	FT		2.6	1.7	3.9	16.3	11.9	0.73	0.52	18.1	31.4	10.3	0.87	7.4	89.1	3.49	
1.8	0.13	0.31	40	3.5	2.6	6.1	16.4	11.9	0.73	0.49	18.1	33.6	10.5	0.87	7.5	89.5	3.54	
2.6	0.28	0.65		1.8	0.8	1.9	15.8	11.7	0.74	0.64	18.0	24.8	11.3	0.88	8.3	90.9	3.74	
3.5	0.51	1.18		2.6	1.6	3.8	16.0	11.8	0.74	0.59	18.0	27.0	11.7	0.89	8.6	91.6	3.84	
			50	3.5	2.6	5.9	16.1	11.8	0.74	0.57	18.0	28.4	11.9	0.90	8.9	92.1	3.91	
				1.8	0.8	1.8	15.5	11.5	0.74	0.71	17.9	21.8	12.7	0.91	9.6	93.5	4.09	
				2.6	1.6	3.7	15.7	11.6	0.74	0.66	18.0	23.6	13.2	0.91	10.1	94.4	4.22	
			60	3.5	2.5	5.7	15.8	11.7	0.74	0.57	17.8	27.9	13.5	0.92	10.4	95.0	4.30	
				1.8	0.8	1.8	15.0	11.2	0.74	0.79	17.7	18.9	14.1	0.93	11.0	96.2	4.46	
				2.6	1.5	3.5	15.3	11.3	0.74	0.74	17.8	20.6	14.7	0.94	11.5	97.2	4.60	
			70	3.5	2.4	5.5	15.4	11.4	0.74	0.71	17.9	21.7	15.1	0.94	11.9	97.9	4.69	
				1.8	0.7	1.7	14.4	10.8	0.75	0.89	17.4	16.2	15.6	0.95	12.4	98.9	4.82	
				2.6	1.5	3.4	14.8	11.0	0.75	0.83	17.6	17.8	16.2	0.96	13.0	100.0	4.97	
			80	3.5	2.3	5.4	15.0	11.1	0.74	0.80	17.7	18.8	16.6	0.96	13.3	100.8	5.06	
				1.8	0.7	1.6	13.7	10.5	0.77	1.02	17.1	13.4	17.0	0.97	13.7	101.5	5.15	
				2.6	1.4	3.3	14.1	10.7	0.76	0.94	17.3	15.0	17.6	0.97	14.3	102.7	5.30	
			90	3.5	2.2	5.2	14.4	10.8	0.75	0.90	17.4	16.0	18.0	0.98	14.7	103.4	5.39	
				1.8	0.7	1.6	12.7	10.1	0.79	1.17	16.7	10.9	18.3	0.98	14.9	103.8	5.45	
				2.6	1.4	3.2	13.3	10.3	0.77	1.08	17.0	12.3	18.9	0.99	15.5	105.0	5.58	
			100	3.5	2.2	5.0	13.6	10.4	0.77	1.03	17.1	13.2	19.2	1.00	15.8	105.6	5.65	
				1.8	0.7	1.5	11.7	9.6	0.83	1.37	16.3	8.5	Operation Not Recommended					
				2.6	1.3	3.1	12.3	9.9	0.80	1.25	16.6	9.8						
				3.5	2.1	4.8	12.6	10.0	0.79	1.19	16.7	10.6						
			110	1.8	0.6	1.5	10.3	9.1	0.87	1.61	15.9	6.4	Operation Not Recommended					
				2.6	1.3	3.0	11.1	9.4	0.85	1.47	16.1	7.5						
				3.5	2.0	4.6	11.5	9.6	0.83	1.40	16.3	8.2						

Interpolation is permissible; extrapolation is not.

All entering air conditions are 80°F DB and 67°F WB in cooling, and 70°F DB in heating.

ARI/ISO certified conditions are 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.

Table does not reflect fan or pump power corrections for ARI/ISO conditions.

All performance is based upon the lower voltage of dual voltage rated units.

Performance stated is at the rated power supply; performance may vary as the power supply varies from the rated.

Operation below 40°F EWT is based upon a 15% antifreeze solution.

Operation below 60°F EWT requires optional insulated water/refrigerant circuit.

See performance correction tables for operating conditions other than those listed above.

See Performance Data Selection Notes for operation in the shaded areas.

# GR Series 60Hz - R22 Submittal Data Eng/I-P



## Performance Data GR H/V 019

600 CFM Nominal (Rated) Airflow

Performance capacities shown in thousands of Btuh

*WPD Adder for Motorized Valve, GR H/V 019 (Cv = 4.9, MOPD = 150 psi)		EWT °F	GPM	*WPD		Cooling - EAT 80/67°F					Heating - EAT 70°F				
				PSI	FT	TC	SC	Sens/Tot Ratio	kW	HR	EER	HC	kW	HE	LAT
20	4.5	5.6	12.9	Operation Not Recommended					11.7	1.14	7.9	88.1	3.02		
GPM	WPD Adder	2.3	1.7	3.9	24.3	15.7	0.64	1.01	27.7	24.0	13.1	1.18	9.1	90.3	3.25
		3.4	3.3	7.7	25.1	15.9	0.63	0.98	28.5	25.7	13.8	1.22	9.6	91.3	3.32
		4.5	5.4	12.5	26.0	16.2	0.62	0.94	29.2	27.6	14.5	1.25	10.2	92.3	3.38
2.3	0.22	0.51													
3.4	0.48	1.11													
4.5	0.84	1.95													
40		2.3	1.6	3.8	24.1	15.4	0.64	1.14	27.9	21.2	15.6	1.29	11.2	94.1	3.54
		3.4	3.2	7.4	24.9	15.6	0.63	1.10	28.6	22.7	16.4	1.33	11.8	95.3	3.61
		4.5	5.3	12.1	25.8	15.9	0.62	1.05	29.4	24.4	17.2	1.37	12.5	96.5	3.68
50		2.3	1.6	3.7	23.3	15.0	0.65	1.26	27.5	18.5	18.1	1.40	13.3	97.9	3.78
		3.4	3.1	7.2	24.1	15.3	0.63	1.21	28.2	19.8	19.0	1.44	14.1	99.3	3.86
		4.5	5.1	11.8	24.9	15.5	0.62	1.17	28.9	21.3	19.9	1.48	14.8	100.7	3.93
60		2.3	1.5	3.5	22.0	14.6	0.66	1.38	26.7	15.9	20.5	1.51	15.4	101.7	3.99
		3.4	3.0	7.0	22.8	14.8	0.65	1.33	27.3	17.1	21.6	1.55	16.3	103.3	4.07
		4.5	4.9	11.4	23.6	15.1	0.64	1.28	28.0	18.4	22.6	1.60	17.2	104.9	4.15
70		2.3	1.5	3.4	20.5	14.1	0.69	1.50	25.7	13.7	23.0	1.61	17.5	105.5	4.17
		3.4	2.9	6.8	21.3	14.4	0.68	1.45	26.2	14.7	24.2	1.66	18.5	107.3	4.26
		4.5	4.8	11.0	22.0	14.6	0.66	1.40	26.8	15.8	25.3	1.71	19.5	109.1	4.34
80		2.3	1.4	3.3	19.0	13.6	0.72	1.63	24.5	11.7	25.5	1.72	19.6	109.3	4.33
		3.4	2.8	6.5	19.6	13.8	0.70	1.57	25.0	12.5	26.8	1.77	20.7	111.3	4.42
		4.5	4.6	10.6	20.3	14.1	0.69	1.51	25.5	13.5	28.1	1.83	21.8	113.3	4.50
90		2.3	1.4	3.2	17.5	13.0	0.74	1.75	23.4	10.0	27.9	1.83	21.7	113.1	4.47
		3.4	2.7	6.3	18.1	13.2	0.73	1.69	23.9	10.7	29.4	1.88	22.9	115.3	4.56
		4.5	4.4	10.3	18.7	13.4	0.72	1.62	24.3	11.5	30.8	1.94	24.2	117.5	4.65
100		2.3	1.3	3.1	16.2	12.4	0.76	1.87	22.6	8.7					
		3.4	2.6	6.1	16.8	12.6	0.75	1.80	23.0	9.3					
		4.5	4.3	9.9	17.4	12.8	0.74	1.74	23.3	10.0					
110		2.3	1.3	3.0	15.4	11.7	0.76	1.99	22.2	7.7	Operation Not Recommended				
		3.4	2.5	5.8	15.9	11.8	0.74	1.92	22.5	8.3					
		4.5	4.1	9.5	16.5	12.0	0.73	1.85	22.8	8.9					

Interpolation is permissible; extrapolation is not.

All entering air conditions are 80°F DB and 67°F WB in cooling, and 70°F DB in heating.

ARI/ISO certified conditions are 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.

Table does not reflect fan or pump power corrections for ARI/ISO conditions.

All performance is based upon the lower voltage of dual voltage rated units.

Performance stated is at the rated power supply; performance may vary as the power supply varies from the rated.

Operation below 40°F EWT is based upon a 15% antifreeze solution.

Operation below 60°F EWT requires optional insulated water/refrigerant circuit.

See performance correction tables for operating conditions other than those listed above.

See Performance Data Selection Notes for operation in the shaded areas.

**Performance Data**  
**GR H/V 024**

800 CFM Nominal (Rated) Airflow

Performance capacities shown in thousands of Btuh

*WPD Adder for Motorized Valve, GR H/V 024 (Cv = 4.9, MOPD = 150 psi)			EWT °F	GPM	*WPD		Cooling - EAT 80/67°F					Heating - EAT 70°F					
					PSI	FT	TC	SC	Sens/Tot Ratio	kW	HR	EER	HC	kW	HE	LAT	COP
			20	6.0	9.2	21.3	Operation Not Recommended					13.4	1.34	8.9	85.5	2.94	
GPM	WPD Adder		30	3.0	2.7	6.2	29.8	19.3	0.65	1.12	33.6	26.5	13.6	1.37	8.9	85.7	2.91
	PSI	FT		4.5	5.4	12.5	30.2	19.4	0.64	1.08	33.9	28.1	14.0	1.39	9.2	86.2	2.94
3.0	0.37	0.87	40	6.0	8.9	20.6	30.7	19.6	0.64	1.03	34.2	29.9	14.4	1.42	9.5	86.7	2.97
4.5	0.84	1.95		3.0	2.6	6.0	28.3	19.5	0.69	1.34	32.9	21.1	16.2	1.50	11.1	88.7	3.16
6.0	1.50	3.46		4.5	5.3	12.1	28.8	19.6	0.68	1.28	33.2	22.4	16.7	1.53	11.5	89.3	3.19
			50	6.0	8.7	20.0	29.2	19.8	0.68	1.23	33.4	23.8	17.2	1.56	11.8	89.9	3.22
				3.0	2.5	5.8	27.0	18.9	0.70	1.49	32.1	18.2	19.7	1.66	14.1	92.8	3.47
				4.5	5.1	11.8	27.5	19.0	0.69	1.42	32.3	19.3	20.3	1.70	14.5	93.5	3.51
			60	6.0	8.4	19.4	27.9	19.2	0.69	1.36	32.5	20.5	20.9	1.73	15.0	94.2	3.55
				3.0	2.4	5.6	25.7	18.0	0.70	1.62	31.3	15.9	23.4	1.83	17.2	97.1	3.76
				4.5	4.9	11.4	26.1	18.2	0.69	1.55	31.4	16.9	24.1	1.86	17.8	97.9	3.80
			70	6.0	8.1	18.8	26.5	18.3	0.69	1.48	31.6	17.9	24.9	1.90	18.4	98.8	3.84
				3.0	2.4	5.4	24.4	17.3	0.71	1.77	30.4	13.8	26.5	1.96	19.8	100.7	3.96
				4.5	4.8	11.0	24.8	17.4	0.70	1.69	30.5	14.6	27.3	2.00	20.5	101.6	4.01
			80	6.0	7.9	18.2	25.1	17.5	0.70	1.62	30.7	15.5	28.1	2.03	21.2	102.6	4.05
				3.0	2.3	5.2	23.0	16.8	0.73	1.95	29.6	11.8	28.2	2.04	21.3	102.7	4.05
				4.5	4.6	10.6	23.3	16.9	0.73	1.87	29.7	12.5	29.1	2.08	22.0	103.6	4.10
			90	6.0	7.6	17.5	23.7	17.1	0.72	1.78	29.8	13.3	29.9	2.12	22.7	104.6	4.14
				3.0	2.2	5.1	21.6	16.6	0.77	2.15	28.9	10.1	27.7	2.03	20.8	102.1	4.00
				4.5	4.4	10.3	21.9	16.7	0.76	2.06	29.0	10.7	28.6	2.07	21.5	103.1	4.04
			100	6.0	7.3	16.9	22.3	16.8	0.76	1.97	29.0	11.3	29.4	2.11	22.2	104.0	4.08
				3.0	2.1	4.9	20.4	16.4	0.80	2.33	28.4	8.7	Operation Not Recommended				
				4.5	4.3	9.9	20.7	16.5	0.80	2.24	28.3	9.3					
			110	6.0	7.1	16.3	21.0	16.6	0.79	2.14	28.3	9.8					
				3.0	2.0	4.7	19.6	15.7	0.80	2.45	27.9	8.0					
				4.5	4.1	9.5	19.9	15.9	0.80	2.35	27.9	8.5					
			110	6.0	6.8	15.7	20.2	16.0	0.79	2.24	27.8	9.0	Operation Not Recommended				

Interpolation is permissible; extrapolation is not.

All entering air conditions are 80°F DB and 67°F WB in cooling, and 70°F DB in heating.

ARI/ISO certified conditions are 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.

Table does not reflect fan or pump power corrections for ARI/ISO conditions.

All performance is based upon the lower voltage of dual voltage rated units.

Performance stated is at the rated power supply; performance may vary as the power supply varies from the rated.

Operation below 40°F EWT is based upon a 15% antifreeze solution.

Operation below 60°F EWT requires optional insulated water/refrigerant circuit.

See performance correction tables for operating conditions other than those listed above.

See Performance Data Selection Notes for operation in the shaded areas.

# GR Series 60Hz - R22 Submittal Data Eng/I-P



## Performance Data GR H/V 030

1000 CFM Nominal (Rated) Airflow

Performance capacities shown in thousands of Btuh

*WPD Adder for Motorized Valve, GR H/V 030 (Cv = 10.3, MOPD = 150 psi)		EWT °F	GPM	*WPD		Cooling - EAT 80/67°F					Heating - EAT 70°F															
				PSI	FT	TC	SC	Sens/Tot Ratio	kW	HR	EER	HC	kW	HE	LAT	COP										
20	7.5	4.5	10.3	Operation Not Recommended					17.2	1.69	11.5	86.0	2.98													
GPM	WPD Adder	3.8	1.3	3.0	39.6	28.7	0.72	1.46	44.6	27.1	18.9	1.77	12.8	87.5	3.13											
		5.5	2.5	5.8	40.9	29.2	0.71	1.41	45.7	29.0	19.5	1.80	13.4	88.1	3.18											
		7.5	4.3	10.0	42.2	29.8	0.71	1.36	46.9	31.1	20.2	1.83	14.0	88.7	3.24											
3.8	0.14	0.31	5.5	0.29	0.66	7.5	2.4	5.6	34.6	25.5	0.74	1.59	40.1	21.8	21.9	1.90	15.5	90.3	3.38							
7.5	0.53	1.22	40	3.8	1.3	2.9	5.5	4.2	37.0	26.5	0.72	1.48	42.0	25.0	23.5	1.96	16.8	91.8	3.50	22.7	1.93	16.1	91.0	3.44		
50	3.8	1.2	2.8	5.5	2.4	5.4	7.5	4.1	31.5	23.6	0.75	1.75	37.4	18.0	25.2	2.03	18.3	93.4	3.64	26.1	2.07	19.1	94.2	3.70		
60	3.8	1.2	2.7	5.5	2.3	5.3	7.5	3.9	29.6	22.5	0.76	1.92	36.1	15.4	28.6	2.16	21.2	96.4	3.88	29.6	2.20	22.1	97.4	3.95		
70	3.8	1.1	2.7	5.5	2.2	5.1	7.5	3.8	28.4	22.0	0.77	2.11	35.6	13.4	31.9	2.28	24.1	99.5	4.10	33.0	2.32	25.1	100.5	4.17		
80	3.8	1.1	2.6	5.5	2.1	4.9	7.5	3.7	27.6	21.7	0.78	2.31	35.5	12.0	35.0	2.39	26.9	102.4	4.30	36.2	2.43	27.9	103.5	4.37		
90	3.8	1.1	2.5	5.5	2.1	4.7	7.5	3.6	26.6	21.2	0.80	2.50	35.1	10.6	37.9	2.48	29.4	105.0	4.47	39.2	2.52	30.6	106.3	4.55		
100	3.8	1.0	2.4	5.5	2.0	4.6	7.5	3.4	25.7	20.8	0.81	2.60	34.5	9.9	34.0	9.2	30.5	2.39	26.9	102.4	4.30	36.2	2.43	27.9	103.5	4.37
110	3.8	1.0	2.3	5.5	1.9	4.4	7.5	3.3	21.9	18.9	0.87	2.88	31.7	7.6	32.1	8.1	37.5	2.47	29.0	104.7	4.45	39.2	2.52	30.6	106.3	4.55

Interpolation is permissible; extrapolation is not.  
 All entering air conditions are 80°F DB and 67°F WB in cooling, and 70°F DB in heating.  
 ARI/ISO certified conditions are 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.  
 Table does not reflect fan or pump power corrections for ARI/ISO conditions.  
 All performance is based upon the lower voltage of dual voltage rated units.  
 Performance stated is at the rated power supply; performance may vary as the power supply varies from the rated.  
 Operation below 40°F EWT is based upon a 15% antifreeze solution.  
 Operation below 60°F EWT requires optional insulated water/refrigerant circuit.  
 See performance correction tables for operating conditions other than those listed above.  
 See Performance Data Selection Notes for operation in the shaded areas.

# GR Series 60Hz - R22 Submittal Data Eng/I-P



## Performance Data GR H/V 036

1200 CFM Nominal (Rated) Airflow

Performance capacities shown in thousands of Btu/h

*WPD Adder for Motorized Valve, GR H/V 036 (Cv = 10.3, MOPD = 150 psi)			EWT °F	GPM	*WPD		Cooling - EAT 80/67°F					Heating - EAT 70°F						
					PSI	FT	TC	SC	Sens/Tot Ratio	kW	HR	EER	HC	kW	HE	LAT	COP	
20	9.0	3.9	8.9		Operation Not Recommended					20.2	2.09	13.1	85.6	2.84				
GPM	WPD Adder	4.5	0.9	2.1	41.1	28.2	0.69	1.94	47.7	21.2	22.9	2.20	15.4	87.7	3.05			
		6.8	2.1	4.9	41.8	28.4	0.68	1.89	48.3	22.2	23.6	2.24	16.0	88.2	3.09			
		9.0	3.7	8.6	42.6	28.6	0.67	1.83	48.8	23.3	24.3	2.28	16.5	88.8	3.12			
4.5	0.19	0.44			4.5	0.9	2.1	39.2	28.5	0.73	2.05	46.2	19.1	27.0	2.39	18.9	90.9	3.32
6.8	0.44	1.01			6.8	2.1	4.8	39.9	28.7	0.72	1.99	46.6	20.0	27.9	2.44	19.6	91.5	3.36
9.0	0.76	1.76			9.0	3.6	8.4	40.5	28.9	0.71	1.93	47.1	21.0	28.7	2.48	20.3	92.2	3.39
		4.5	0.9	2.0	38.0	28.1	0.74	2.23	45.6	17.1	31.4	2.58	22.5	94.2	3.56			
		6.8	2.0	4.6	38.7	28.3	0.73	2.16	46.1	17.9	32.4	2.64	23.4	95.0	3.60			
		9.0	3.5	8.1	39.4	28.5	0.72	2.10	46.5	18.7	33.3	2.69	24.2	95.7	3.64			
		4.5	0.8	1.9	37.0	27.3	0.74	2.43	45.3	15.2	35.7	2.78	26.3	97.6	3.76			
		6.8	1.9	4.5	37.7	27.5	0.73	2.36	45.7	16.0	36.9	2.84	27.2	98.4	3.81			
		9.0	3.4	7.9	38.3	27.7	0.72	2.29	46.1	16.8	38.0	2.89	28.1	99.3	3.85			
		4.5	0.8	1.9	35.8	26.4	0.74	2.62	44.7	13.7	40.1	2.98	29.9	100.9	3.94			
		6.8	1.9	4.3	36.4	26.6	0.73	2.54	45.1	14.3	41.4	3.04	31.0	101.9	3.99			
		9.0	3.3	7.6	37.0	26.8	0.72	2.46	45.4	15.0	42.6	3.10	32.1	102.9	4.03			
		4.5	0.8	1.8	34.1	25.5	0.75	2.78	43.6	12.2	44.4	3.17	33.5	104.2	4.10			
		6.8	1.8	4.2	34.7	25.7	0.74	2.70	43.9	12.8	45.8	3.23	34.7	105.3	4.15			
		9.0	3.2	7.3	35.3	25.9	0.73	2.62	44.2	13.5	47.2	3.30	35.9	106.4	4.19			
		4.5	0.8	1.7	32.0	24.7	0.77	2.96	42.1	10.8	48.6	3.36	37.1	107.5	4.24			
		6.8	1.7	4.0	32.6	24.9	0.76	2.87	42.4	11.4	50.1	3.43	38.4	108.7	4.28			
		9.0	3.1	7.1	33.1	25.1	0.76	2.78	42.6	11.9	51.6	3.49	39.7	109.8	4.33			
		4.5	0.7	1.7	29.9	23.9	0.80	3.17	40.7	9.4	Operation Not Recommended							
		6.8	1.7	3.9	30.4	24.1	0.79	3.08	41.0	9.9								
		9.0	3.0	6.8	31.0	24.3	0.78	2.99	41.2	10.4								
		4.5	0.7	1.6	28.3	23.1	0.82	3.51	40.3	8.1								
		6.8	1.6	3.7	28.8	23.3	0.81	3.40	40.5	8.5								
		9.0	2.8	6.6	29.3	23.4	0.80	3.30	40.6	8.9								

Interpolation is permissible; extrapolation is not.

All entering air conditions are 80°F DB and 67°F WB in cooling, and 70°F DB in heating.

ARI/ISO certified conditions are 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.

Table does not reflect fan or pump power corrections for ARI/ISO conditions.

All performance is based upon the lower voltage of dual voltage rated units.

Performance stated is at the rated power supply; performance may vary as the power supply varies from the rated.

Operation below 40°F EWT is based upon a 15% antifreeze solution.

Operation below 60°F EWT requires optional insulated water/refrigerant circuit.

See performance correction tables for operating conditions other than those listed above.

See Performance Data Selection Notes for operation in the shaded areas.

# GR Series 60Hz - R22 Submittal Data Eng/I-P



## Performance Data GR H/V 042

1400 CFM Nominal (Rated) Airflow

Performance capacities shown in thousands of Btu/h

*WPD Adder for Motorized Valve, GR H/V 042 (Cv = 10.3, MOPD = 150 psi)		EWT °F	GPM	*WPD		Cooling - EAT 80/67°F					Heating - EAT 70°F						
				PSI	FT	TC	SC	Sens/Tot Ratio	kW	HR	EER	HC	kW	HE	LAT	COP	
20	10.5	5.3	12.2	Operation Not Recommended					24.4	2.37	16.3	86.1	3.02				
GPM	WPD Adder	5.3	1.3	3.0	47.6	33.2	0.70	2.10	54.8	22.7	28.5	2.54	19.8	88.8	3.29		
		7.9	2.9	6.6	48.1	33.4	0.69	2.03	55.0	23.7	29.2	2.57	20.5	89.3	3.33		
		10.5	5.1	11.8	48.6	33.6	0.69	1.97	55.3	24.7	30.0	2.61	21.1	89.8	3.37		
5.3	0.26	0.61	5.3	1.2	2.9	48.0	33.6	0.70	2.35	56.0	20.4	33.5	2.75	24.1	92.1	3.56	
			7.9	2.8	6.4	48.5	33.8	0.70	2.27	56.2	21.3	34.4	2.79	24.8	92.7	3.61	
			10.5	5.0	11.4	49.0	34.1	0.70	2.20	56.5	22.2	35.3	2.83	25.6	93.3	3.65	
7.9	0.59	1.36	5.3	1.2	2.8	47.3	33.4	0.71	2.56	56.0	18.5	38.1	2.95	28.1	95.2	3.79	
			7.9	2.7	6.2	47.8	33.7	0.70	2.48	56.3	19.3	39.1	2.99	28.9	95.9	3.84	
			10.5	4.8	11.1	48.3	33.9	0.70	2.40	56.5	20.1	40.2	3.03	29.8	96.6	3.88	
10.5	1.04	2.40	5.3	1.2	2.7	45.8	32.7	0.72	2.77	55.2	16.5	42.4	3.12	31.8	98.1	3.98	
			7.9	2.6	6.0	46.2	33.0	0.71	2.69	55.4	17.2	43.6	3.16	32.8	98.8	4.03	
			10.5	4.6	10.7	46.7	33.2	0.71	2.60	55.6	18.0	44.7	3.21	33.8	99.6	4.08	
40	5.3	1.1	2.6	43.6	31.7	0.73	3.00	53.8	14.5	46.4	3.27	35.2	100.7	4.15			
				7.9	2.5	5.8	44.0	31.9	0.72	2.91	54.0	15.1	47.6	3.32	36.3	101.5	4.21
				10.5	4.5	10.4	44.5	32.1	0.72	2.82	54.1	15.8	48.9	3.36	37.4	102.3	4.26
50	7.9	2.4	5.6	41.0	30.4	0.74	3.26	52.1	12.6	50.0	3.40	38.4	103.1	4.30			
				10.5	4.3	10.0	41.4	30.6	0.74	3.16	52.2	13.1	51.4	3.45	39.6	104.0	4.36
				10.5	4.3	10.0	41.8	30.8	0.74	3.06	52.2	13.7	52.7	3.50	40.8	104.9	4.41
60	7.9	2.6	6.0	38.2	29.0	0.76	3.52	50.2	10.8	53.3	3.52	41.3	105.3	4.44			
				10.5	4.2	9.7	38.5	29.2	0.76	3.42	50.2	11.3	54.8	3.57	42.6	106.2	4.50
				10.5	4.2	9.7	38.9	29.4	0.75	3.31	50.2	11.8	56.2	3.61	43.9	107.2	4.56
80	7.9	2.4	5.6	35.4	27.7	0.78	3.78	48.2	9.4	Operation Not Recommended							
				10.5	4.0	9.3	35.7	27.9	0.78	3.66	48.2	9.8					
				10.5	4.0	9.3	36.1	28.1	0.78	3.55	48.2	10.2					
100	7.9	2.2	5.1	32.8	26.8	0.82	3.98	46.4	8.3								
				10.5	3.9	9.0	33.2	27.0	0.81	3.86	46.3	8.6					
				10.5	3.9	9.0	33.5	27.2	0.81	3.73	46.2	9.0					

Interpolation is permissible; extrapolation is not.

All entering air conditions are 80°F DB and 67°F WB in cooling, and 70°F DB in heating.

ARI/ISO certified conditions are 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.

Table does not reflect fan or pump power corrections for ARI/ISO conditions.

All performance is based upon the lower voltage of dual voltage rated units.

Performance stated is at the rated power supply; performance may vary as the power supply varies from the rated.

Operation below 40°F EWT is based upon a 15% antifreeze solution.

Operation below 60°F EWT requires optional insulated water/refrigerant circuit.

See performance correction tables for operating conditions other than those listed above.

See Performance Data Selection Notes for operation in the shaded areas.

**Performance Data**  
**GR H/V 048**

1600 CFM Nominal (Rated) Airflow

Performance capacities shown in thousands of Btuh

*WPD Adder for Motorized Valve, GR H/V 048 (Cv = 10.3, MOPD = 150 psi)			EWT °F	GPM	*WPD		Cooling - EAT 80/67°F					Heating - EAT 70°F					
					PSI	FT	TC	SC	Sens/Tot Ratio	kW	HR	EER	HC	KW	HE	LAT	COP
20	12.0	7.6	17.6	Operation Not Recommended						29.6	2.96	19.5	87.1	2.93			
GPM	WPD Adder		6.0	2.5	5.8	51.6	35.5	0.69	2.49	60.1	20.7	33.5	3.01	23.2	89.4	3.26	
	PSI	FT	30	9.0	4.7	10.9	52.5	35.0	0.67	2.42	60.8	21.7	34.4	3.07	23.9	89.9	3.28
6.0	0.34	0.78	40	12.0	7.4	17.1	53.4	34.6	0.65	2.35	61.4	22.8	35.2	3.14	24.5	90.4	3.29
9.0	0.76	1.76	50	6.0	2.4	5.6	55.4	38.6	0.70	2.76	64.8	20.1	38.7	3.23	27.7	92.4	3.51
12.0	1.36	3.14	60	9.0	4.6	10.6	56.3	38.1	0.68	2.68	65.5	21.0	39.7	3.30	28.5	93.0	3.53
			70	12.0	7.2	16.6	57.3	37.6	0.66	2.60	66.1	22.1	40.7	3.37	29.2	93.6	3.54
			80	6.0	2.3	5.4	55.0	39.3	0.71	3.01	65.2	18.2	44.4	3.48	32.6	95.7	3.74
			90	9.0	4.4	10.2	55.9	38.8	0.69	2.92	65.9	19.1	45.6	3.56	33.5	96.4	3.76
			100	12.0	7.0	16.1	56.8	38.2	0.67	2.83	66.5	20.1	46.8	3.63	34.4	97.1	3.77
			110	6.0	2.3	5.2	52.6	38.5	0.73	3.27	63.8	16.1	50.9	3.75	38.1	99.4	3.97
				9.0	4.3	9.9	53.5	38.0	0.71	3.17	64.3	16.9	52.2	3.83	39.1	100.2	3.99
				12.0	6.7	15.6	54.4	37.5	0.69	3.08	64.9	17.7	53.6	3.91	40.2	101.0	4.01
				6.0	2.2	5.1	49.8	37.2	0.75	3.53	61.9	14.1	57.6	4.03	43.9	103.4	4.19
				9.0	4.1	9.6	50.7	36.7	0.72	3.43	62.4	14.8	59.2	4.12	45.1	104.2	4.21
				12.0	6.5	15.1	51.5	36.2	0.70	3.32	62.9	15.5	60.7	4.20	46.3	105.1	4.23
				6.0	2.1	4.9	47.4	35.8	0.76	3.81	60.4	12.4	63.8	4.31	49.1	106.9	4.34
				9.0	4.0	9.3	48.2	35.3	0.73	3.70	60.8	13.0	65.5	4.41	50.5	107.9	4.36
				12.0	6.3	14.6	49.0	34.8	0.71	3.59	61.3	13.7	67.2	4.50	51.8	108.9	4.38
				6.0	2.0	4.7	45.5	34.5	0.76	4.10	59.4	11.1	68.0	4.60	52.3	109.4	4.33
				9.0	3.9	8.9	46.2	34.0	0.74	3.98	59.8	11.6	69.8	4.70	53.8	110.4	4.35
				12.0	6.1	14.0	47.0	33.5	0.71	3.86	60.2	12.2	71.6	4.80	55.2	111.4	4.37
				6.0	2.0	4.5	43.3	33.1	0.76	4.39	58.3	9.9					
				9.0	3.7	8.6	44.1	32.6	0.74	4.26	58.6	10.3					
				12.0	5.9	13.5	44.8	32.2	0.72	4.13	58.9	10.8					
				6.0	1.9	4.4	39.6	31.3	0.79	4.68	55.6	8.5					
				9.0	3.6	8.3	40.3	30.9	0.77	4.54	55.8	8.9					
				12.0	5.6	13.0	41.0	30.4	0.74	4.40	56.0	9.3					

Interpolation is permissible; extrapolation is not.

All entering air conditions are 80°F DB and 67°F WB in cooling, and 70°F DB in heating.

ARI/ISO certified conditions are 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.

Table does not reflect fan or pump power corrections for ARI/ISO conditions.

All performance is based upon the lower voltage of dual voltage rated units.

Performance stated is at the rated power supply; performance may vary as the power supply varies from the rated.

Operation below 40°F EWT is based upon a 15% antifreeze solution.

Operation below 60°F EWT requires optional insulated water/refrigerant circuit.

See performance correction tables for operating conditions other than those listed above.

See Performance Data Selection Notes for operation in the shaded areas.

Operation Not Recommended

# GR Series 60Hz - R22 Submittal Data Eng/I-P



## Performance Data GR H/V 060

2000 CFM Nominal (Rated) Airflow

Performance capacities shown in thousands of Btu/h

*WPD Adder for Motorized Valve, GR H/V 060 (Cv = 10.3, MOPD = 150 psi)		EWT °F	GPM	*WPD		Cooling - EAT 80/67°F					Heating - EAT 70°F						
				PSI	FT	TC	SC	Sens/Tot Ratio	kW	HR	EER	HC	kW	HE	LAT	COP	
20	15.0	10.8	25.0	Operation Not Recommended					38.5	3.91	25.1	87.8	2.88				
GPM	WPD Adder		7.5	7.5	3.5	8.2	54.2	37.6	0.69	3.29	65.4	16.5	43.1	3.97	29.6	90.0	3.18
	PSI	FT		11.3	6.7	15.6	54.3	37.7	0.69	3.18	65.2	17.1	43.8	4.01	30.1	90.3	3.20
7.5	0.53	1.22	30	15.0	10.5	24.3	54.5	37.8	0.69	3.08	65.0	17.7	44.5	4.04	30.7	90.6	3.22
11.3	1.20	2.78		7.5	3.4	7.9	62.6	44.3	0.71	3.64	75.0	17.2	49.3	4.12	35.2	92.8	3.51
15.0	2.12	4.90	40	11.3	6.5	15.1	62.7	44.5	0.71	3.52	74.7	17.8	50.1	4.15	35.9	93.2	3.53
				15.0	10.2	23.6	62.9	44.6	0.71	3.40	74.5	18.5	50.8	4.19	36.5	93.5	3.55
			50	7.5	3.3	7.7	65.3	47.0	0.72	3.93	78.7	16.6	55.8	4.28	41.2	95.8	3.82
				11.3	6.3	14.6	65.5	47.2	0.72	3.80	78.4	17.2	56.7	4.32	41.9	96.2	3.84
			60	15.0	9.9	22.9	65.6	47.3	0.72	3.68	78.2	17.8	57.6	4.36	42.7	96.7	3.87
				7.5	3.2	7.4	64.8	47.3	0.73	4.21	79.2	15.4	62.4	4.46	47.2	98.9	4.10
			70	11.3	6.1	14.2	65.0	47.5	0.73	4.07	78.9	16.0	63.4	4.50	48.1	99.4	4.13
				15.0	9.6	22.1	65.2	47.6	0.73	3.94	78.6	16.6	64.4	4.54	48.9	99.8	4.16
			80	7.5	3.1	7.2	63.0	46.5	0.74	4.50	78.3	14.0	68.6	4.63	52.8	101.7	4.34
				11.3	5.9	13.7	63.1	46.7	0.74	4.36	78.0	14.5	69.6	4.67	53.7	102.2	4.37
			90	15.0	9.3	21.4	63.3	46.8	0.74	4.21	77.6	15.0	70.7	4.72	54.6	102.7	4.39
				7.5	3.0	6.9	60.7	45.4	0.75	4.83	77.2	12.6	73.3	4.77	57.1	104.0	4.51
			100	11.3	5.7	13.2	60.9	45.5	0.75	4.67	76.8	13.0	74.5	4.81	58.1	104.5	4.54
				15.0	8.9	20.7	61.0	45.6	0.75	4.52	76.5	13.5	75.7	4.85	59.1	105.0	4.57
			110	7.5	2.9	6.7	58.6	44.3	0.76	5.22	76.4	11.2	75.6	4.82	59.1	105.0	4.59
				11.3	5.5	12.8	58.7	44.4	0.76	5.05	76.0	11.6	76.8	4.87	60.2	105.6	4.62
			110	15.0	8.6	19.9	58.9	44.5	0.76	4.88	75.5	12.1	78.0	4.91	61.2	106.1	4.65
				7.5	2.8	6.5	56.3	43.1	0.77	5.67	75.6	9.9	Operation Not Recommended				
			11.3	5.3	12.3	56.4	43.3	0.77	5.49	75.2	10.3	Operation Not Recommended					
			110	15.0	8.3	19.2	56.6	43.4	0.77	5.30	74.7	10.7	Operation Not Recommended				
				7.5	2.7	6.2	52.9	41.4	0.78	6.21	74.1	8.5	Operation Not Recommended				
			11.3	5.1	11.8	53.0	41.5	0.78	6.00	73.5	8.8	Operation Not Recommended					
			110	15.0	8.0	18.5	53.2	41.7	0.78	5.80	73.0	9.2	Operation Not Recommended				

Interpolation is permissible; extrapolation is not.

All entering air conditions are 80°F DB and 67°F WB in cooling, and 70°F DB in heating.

ARI/ISO certified conditions are 80.6°F DB and 66.2°F WB in cooling and 68°F DB in heating.

Table does not reflect fan or pump power corrections for ARI/ISO conditions.

All performance is based upon the lower voltage of dual voltage rated units.

Performance stated is at the rated power supply; performance may vary as the power supply varies from the rated.

Operation below 40°F EWT is based upon a 15% antifreeze solution.

Operation below 60°F EWT requires optional insulated water/refrigerant circuit.

See performance correction tables for operating conditions other than those listed above.

See Performance Data Selection Notes for operation in the shaded areas.

## Performance Data Correction Tables

### Air Flow Correction Table

Airflow	Cooling				Heating			
	% of Rated	Total Capacity	Sensible Capacity	Power	Heat of Rejection	Heating Capacity	Power	Heat of Extraction
75%	0.962	0.873	0.962	0.961	0.957	1.061	0.922	
81%	0.974	0.906	0.971	0.972	0.968	1.040	0.946	
88%	0.985	0.938	0.980	0.983	0.979	1.020	0.970	
94%	0.993	0.969	0.990	0.992	0.989	1.010	0.985	
100%	1.000	1.000	1.000	1.000	1.000	1.000	1.000	
106%	1.007	1.034	1.010	1.008	1.011	0.997	1.015	
113%	1.014	1.068	1.019	1.016	1.021	0.994	1.030	

### Entering Air Correction Table

Heating				Cooling												
Entering Air DB°F	Heating Capacity	Power	Heat of Extraction	Entering Air WB°F	Total Capacity	Sensible Cooling Capacity Multiplier - Entering DB °F							Power	Heat of Rejection		
						70	75	80	80.6	85	90	95				
60	1.065	0.937	1.112			0.848	0.882	1.044	1.169	1.203	*	*	*	0.994	0.869	
65	1.024	0.971	1.044			0.971	0.633	0.861	1.070	1.083	1.272	*	*	0.996	0.969	
68	1.005	0.990	1.011			0.996	0.574	0.817	1.030	1.065	1.228	*	*	0.998	0.990	
70	1.000	1.000	1.000			1.000	0.534	0.788	1.000	1.017	1.198	1.314	1.360	1.000	1.000	
75	0.985	1.026	0.970			1.030		0.678	0.863	0.900	1.082	1.210	1.300	1.003	1.019	
80	0.972	1.052	0.944			1.065			0.548	0.653	0.880	1.036	1.201	1.008	1.047	

\* = Sensible capacity equals total capacity  
 ARI/ISO/ASHRAE 13256-1 uses entering air conditions of Cooling - 80.6°F DB/66.2°F WB, 1 and Heating - 68°F DB/59°F WB entering air temperature

### Antifreeze Correction Table

Antifreeze Type	Antifreeze %	Cooling			Heating		WPD Corr. Fct. EWT 30°F	
		EWT 90°F			EWT 30°F			
		Total Cap	Sens Cap	Power	Htg Cap	Power		
Water	0	1.000	1.000	1.000	1.000	1.000	1.000	
Propylene Glycol	5	0.995	0.995	1.003	0.989	0.997	1.070	
	15	0.986	0.986	1.009	0.968	0.990	1.210	
	25	0.978	0.978	1.014	0.947	0.983	1.360	
	5	0.997	0.997	1.002	0.989	0.997	1.070	
Methanol	15	0.990	0.990	1.007	0.968	0.990	1.160	
	25	0.982	0.982	1.012	0.949	0.984	1.220	
	5	0.998	0.998	1.002	0.981	0.994	1.140	
Ethanol	15	0.994	0.994	1.005	0.944	0.983	1.300	
	25	0.986	0.986	1.009	0.917	0.974	1.360	
	5	0.998	0.998	1.002	0.993	0.998	1.040	
Ethylene Glycol	15	0.994	0.994	1.004	0.980	0.994	1.120	
	25	0.988	0.988	1.008	0.966	0.990	1.200	

ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateMaster's Customer Service Department at 1-405-745-6000 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products. The latest version of this document is available at [climatemaster.com](http://climatemaster.com).

# GR Series 60Hz - R22 Submittal Data Eng/I-P



## Blower Performance Data

Model	Fan Speed	Rated Airflow	Min CFM	Airflow (cfm) at External Static Pressure (in. wg)															
				0.00	0.05	0.10	0.15	0.20	0.25	0.30	0.35	0.40	0.45	0.50	0.60	0.70	0.80	0.90	1.00
GRH 006	HI	200	150	300	290	280	270	260	250	240	225	210	185	160					
	MED	200	150	240	230	220	210	200	190	180	160								
	LOW	200	150	220	210	200	195	190	175	160									
GRH/V 009	HI	300	225	450	440	430	415	400	385	370	345	320	310	300	230				
	MED	300	225	410	400	390	375	360	350	340	325	310	290	270					
	LOW	300	225	370	360	350	335	320	315	310	295	280	260	240					
GRH/V 012	HI	375	300	470	460	450	440	430	415	400	390	380	365	350	330				
	MED	375	300	410	395	380	370	360	355	350	340	330	320	310					
	LOW	375	300	340	330	320	315	310	305	300									
GRH/V 015	HI	500	375	750	730	710	695	680	655	630	600	570	535	500	400				
	MED	500	375	660	640	620	605	590	570	550	525	500	470	440					
	LOW	500	375	580	565	550	535	520	500	480	455	430	400						
GRH/V 019	HI	600	450	850	820	790	765	740	705	670	635	600	560	520	450				
	MED	600	450	700	680	660	640	620	590	560	530	500	470						
	LOW	600	450	600	580	560	535	510	485	460									
GRH/V 024	HI	800	600																
	MED	800	600	850	825	800	770	740	715	690	655	620							
	LOW	800	600	700	680	660	645	630	610										
GRH/V 030	HI	1000	750	1330	1295	1260	1225	1190	1145	1100	1050	1000	960	920	830				
	MED	1000	750	1210	1185	1160	1130	1100	1050	1000	965	930	880	830					
	LOW	1000	750	1050	1030	1010	980	950	920	890	850	810	770						
GRH/V 036	HI	1200	900																
	MED	1200	900																
	LOW	1200	900	1100	1080	1060	1035	1010	980	950	920								
GRH/V 042	HI	1400	1050	1790	1760	1730	1695	1660	1625	1590	1550	1510	1475	1440	1370	1270	1120		
	MED	1400	1050	1500	1485	1470	1445	1420	1400	1380	1350	1320	1295	1270	1180	1070			
	LOW	1400	1050	1110	1100	1090	1075	1060	1050										
GRH/V 048	HI	1600	1200																
	MED	1600	1200	1830	1785	1740	1700	1660	1615	1570	1535	1500	1450	1400	1320	1210			
	LOW	1600	1200	1700	1670	1640	1600	1560	1525	1490	1460	1430	1385	1340	1250				
GRH/V 048	HS HI	1600	1200																
	HS MED	1600	1200																
	HS LOW	1600	1200																
GRH/V 060	HI	2000	1500	2230	2215	2200	2160	2120	2090	2060	2035	2010	1985	1960	1880	1790	1660		
	MED	2000	1500	2040	2015	1990	1965	1940	1915	1890	1860	1830	1805	1780	1710	1620			
	LOW	2000	1500	1840	1825	1810	1795	1780	1755	1730	1700	1670	1635	1600	1510				

Black areas denote ESP where operation is not recommended

Units factory shipped on medium speed, other speeds require field selection

All airflow is rated at lowest Voltage if unit is dual Voltage rated, e.g. 208V for 208-230V units

All units ARI/ISO/ASHRAE 13256-1 rated on high fan speed

Only two speed fan (H & M) available on 575V units

Performance stated is at the rated power supply, performance may vary as the power supply varies from the rated.

ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateMaster's Customer Service Department at 1-405-745-6000 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products. The latest version of this document is available at [climatemaster.com](http://climatemaster.com).

## Physical Data

Model	006	009	012	015	019	024	030	036	042	048	060
Compressor (1 Each)	Rotary				Reciprocating						Scroll
Factory Charge R22 (oz) [kg]	12 [.34]	15 [.43]	15 [.43]	30 [.85]	30 [.85]	30 [.85]	41 [1.16]	44 [1.25]	46 [1.30]	54 [1.53]	80 [2.26]
<b>PSC Fan Motor &amp; Blower (3 Speeds)</b>											
Fan Motor (hp) [W]	1/25 [30]	1/10 [75]	1/10 [75]	1/6 [124]	1/5 [150]	1/3 [250]	1/2 [373]	3/4 [560]	3/4 [560]	3/4 [560]	1 [746]
Blower Wheel Size (dia x w) - (in) [mm]	5 x 5 [127 x 127]	5 x 5 [127 x 127]	6 x 5 [152 x 127]	9 x 7 [229 x 178]	10 x 10 [254 x 254]	10 x 10 [254 x 254]	10 x 10 [254 x 254]	11 x 10 [279 x 254]			
<b>Water Connection Size</b>											
IPT (in)	1/2	1/2	1/2	3/4	3/4	3/4	3/4	3/4	1	1	1
<b>Coax Volume</b>											
Volume (US Gallons) [liters]	0.123 [0.47]	0.143 [0.54]	0.167 [0.63]	0.286 [1.08]	.45 [1.70]	.45 [1.70]	0.56 [2.12]	0.76 [2.88]	0.76 [2.88]	0.92 [3.48]	0.92 [3.48]
<b>Vertical Upflow</b>											
Air Coil Dimensions (h x w) - (in) [mm]	N/A	10 x 16 [254 x 406]	10 x 16 [254 x 406]	16 x 16 [406 x 406]	16 x 16 [406 x 406]	16 x 16 [406 x 406]	20 x 20 [508 x 508]	20 x 20 [508 x 508]	28 x 20 [711 x 508]	28 x 20 [711 x 508]	28 x 25 [711 x 635]
Standard Filter - 1" [25.4mm] Throwaway, qty (in) [mm]	N/A	10 x 20 [254 x 508]	10 x 20 [254 x 508]	16 x 20 [406 x 508]	16 x 20 [406 x 508]	16 x 20 [406 x 508]	20 x 24 [508 x 610]	20 x 24 [508 x 610]	28 x 24 [711 x 610]	28 x 24 [711 x 610]	28 x 30 [711 x 762]
<b>Horizontal</b>											
Air Coil Dimensions (h x w) - (in) [mm]	10 x 16 [254 x 406]	10 x 16 [254 x 406]	10 x 16 [254 x 406]	16 x 16 [406 x 406]	16 x 16 [406 x 406]	16 x 16 [406 x 406]	18 x 22 [457 x 559]	18 x 22 [457 x 559]	18 x 31 [457 x 787]	18 x 31 [457 x 787]	20 x 35 [508 x 889]
Standard Filter - 1" [25.4mm] Throwaway, qty (in) [mm]	10 x 20 [254 x 508]	10 x 20 [254 x 508]	10 x 20 [254 x 508]	16 x 20 [406 x 508]	16 x 20 [406 x 508]	16 x 20 [406 x 508]	18 x 24 [457 x 610]	18 x 24 [457 x 610]	(2) 18 x 18 [457 x 457]	(2) 18 x 18 [457 x 457]	1 - 12 x 20, 1 - 25 x 20 [305 x 508], [635 x 508]
Weight - Operating, (lbs) [kg]	110 [50]	112 [51]	121 [55]	147 [67]	169 [77]	193 [88]	219 [100]	229 [104]	257 [117]	267 [121]	323 [147]
Weight - Packaged, (lbs) [kg]	120 [55]	122 [56]	131 [60]	157 [72]	179 [82]	203 [93]	231 [105]	241 [110]	269 [124]	279 [127]	338 [254]

All units have spring compressor mountings, and 1/2" [12.2mm] & 3/4" [19.0mm] electrical knockouts.

<b>Unit Maximum Water Working Pressure</b>	
Options	Max Pressure PSIG [kPa]
Base Unit	450 [3,100]
Internal Secondary Pump (ISP)	145 [999]
Internal Motorized Water Valve (WMV)	300 [2,067]
Internal Auto Flow Valve	450 [3,100]

Use the lowest maximum pressure rating when multiple options are combined.

# GR Series 60Hz - R22 Submittal Data Eng/I-P



## GR - Horizontal Dimensional Data

Horizontal Model	Overall Cabinet			
	A Width	B Length	C Height	
006 - 012	in cm	22.4 56.8	43.1 109.5	11.3 28.7
015 - 024	in cm	22.4 56.8	43.1 109.5	17.3 43.9
030	in cm	22.4 56.8	53.2 135.1	19.3 49.0
036	in cm	22.4 56.8	53.2 135.1	19.3 49.0
042 - 048	in cm	22.4 56.8	62.2 158.0	19.3 49.0
060	in cm	25.4 64.5	71.2 180.8	21.3 54.1

Horizontal Model	Water Connections				
	1	2	3		
	Loop In D	Loop Out E	H	Size IPT	
006 - 012	in cm	2.4 6.1	5.4 13.7	0.6 1.5	1/2"
015 - 024	in cm	2.4 6.1	4.9 12.4	0.6 1.5	3/4"
030	in cm	2.4 6.1	5.4 13.7	0.6 1.5	3/4"
036	in cm	2.4 6.1	5.4 13.7	0.6 1.5	3/4"
042 - 048	in cm	2.4 6.1	5.4 13.7	0.6 1.5	1"
060	in cm	2.4 6.1	5.4 13.7	0.6 1.5	1"



Horizontal Model	Electrical Knockouts			
	J 1/2"	K 1/2"	L 3/4"	
	Low Voltage	External Pump	Power Supply	
006 - 012	in cm	3.5 8.9	5.5 14.0	8.2 20.8
015 - 024	in cm	3.5 8.9	7.5 19.1	10.2 25.9
030	in cm	5.7 14.5	9.7 24.6	12.2 31.0
036	in cm	5.7 14.5	9.7 24.6	12.2 31.0
042 - 048	in cm	5.7 14.5	9.7 24.6	12.2 31.0
060	in cm	8.1 20.6	11.7 29.7	14.2 36.1

Horizontal Model	Discharge Connection Duct Flange Installed (+/- 0.10 in, +/- 2.5mm)						Return Connection Using Return Air Opening			
	M	N	O Supply Height	P Supply Width	Q	R	S Return Width	T Return Height	U	V
006 - 012	in cm	5.8 14.7	4.0 10.2	5.8 14.7	8.0 20.3	5.8 14.7	1.5 3.8	17.1 43.4	9.3 23.6	2.2 5.6
015 - 024	in cm	5.0 12.7	5.6 14.2	10.4 26.4	9.3 23.6	5.0 12.7	1.5 3.8	17.1 43.4	15.3 38.9	2.2 5.6
030	in cm	5.0 12.7	6.8 17.3	10.4 26.4	9.3 23.6	5.0 12.7	2.1 5.3	23.1 58.7	17.3 43.9	2.2 5.6
036	in cm	2.9 7.4	3.8 9.7	13.5 34.3	13.1 33.3	2.9 7.4	1.9 4.8	23.1 58.7	17.3 43.9	2.5 5.6
042 - 048	in cm	2.9 7.4	3.8 9.7	13.5 34.3	13.1 33.3	2.9 7.4	1.9 4.8	32.1 81.5	17.3 43.9	2.2 5.6
060	in cm	5.8 14.7	5.0 12.7	13.6 34.5	13.3 33.8	4.2 14.7	2.9 7.4	36.1 91.7	19.3 49.0	2.2 5.6



ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateMaster's Customer Service Department at 1-405-745-6000 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products. The latest version of this document is available at [climatemaster.com](http://climatemaster.com).

## GR - Horizontal Dimensional Data






### LEFT RETURN

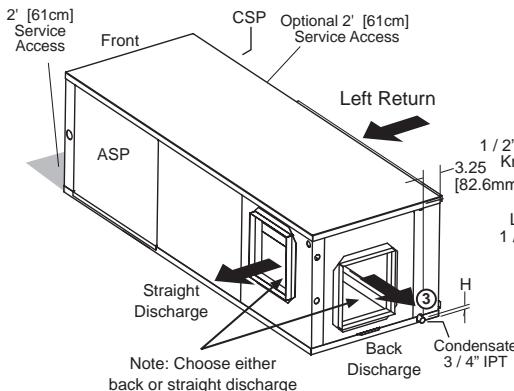

### RIGHT RETURN

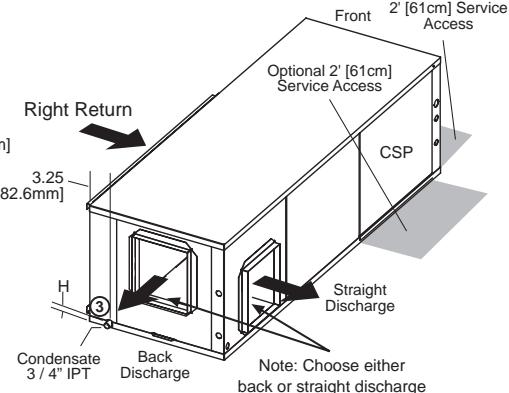

		Front		Y		Z	
		X	IN CM	Y	IN CM	Z	IN CM
MODEL							
006-024	43.1	109.5	24.4	61.9	20.4	51.8	
030-036	53.1	134.9	24.4	61.9	20.4	51.8	
042-048	62.1	157.7	24.4	61.9	20.4	51.8	
060	71.1	180.6	27.4	69.5	23.4	59.4	

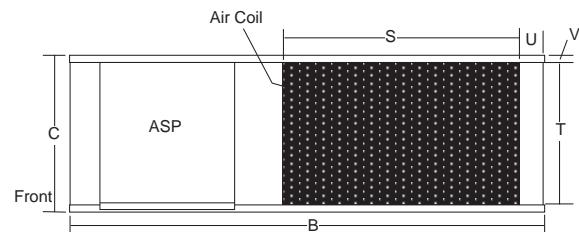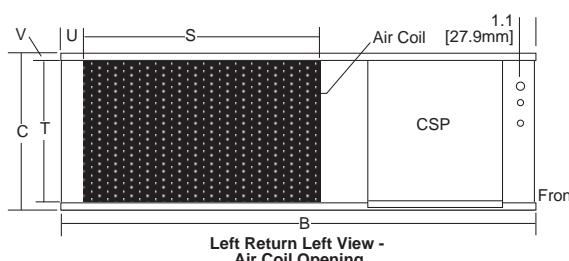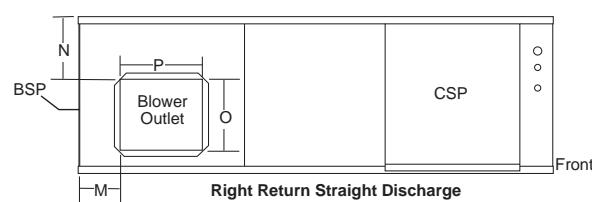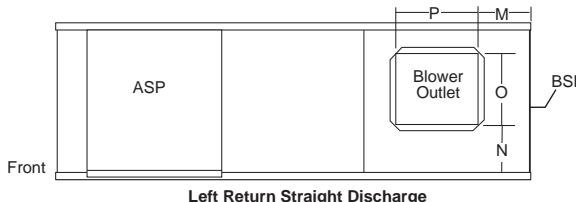

Notes:

1. While clear access to all removable panels is not required, installer should take care to comply with all building codes and allow adequate clearance for future field service.
2. Horizontal units shipped with filter bracket only. This bracket should be removed for return duct connection.
3. Discharge flange and hanger brackets are factory installed.
4. Condensate is 3/4" IPT copper.
5. Blower service panel requires 2' service access.
6. Blower service access is through back panel on straight discharge units or through panel opposite air coil on back discharge units.

Legend:

CAP = Control Access Panel

BSP = Blower Service Panel

CSP = Compressor Access Panel

ASP = Alternative Service Panel

ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateMaster's Customer Service Department at 1-405-745-6000 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products. The latest version of this document is available at [climatemaster.com](http://climatemaster.com).

# GR Series 60Hz - R22 Submittal Data Eng/I-P



## GR - Vertical Upflow Dimensional Data

Vertical Upflow Model	Overall Cabinet			
	A Width	B Depth	C Height	
009 - 012	in cm	22.4 56.8	21.6 54.9	22.6 54.7
015 - 024	in cm	22.4 56.8	21.6 54.9	34.6 87.9
030	in cm	22.4 56.8	25.6 65.1	40.6 103.1
036	in cm	22.4 56.8	25.6 65.1	40.6 103.1
042 - 048	in cm	22.4 56.8	25.6 65.1	48.6 123.4
060	in cm	25.4 64.5	30.6 77.8	50.6 128.5


Vertical Upflow Model	Water Connections				
	1	2	3		
	Loop In D	Loop Out E	H	Size IPT	
009 - 012	in cm	2.6 6.6	5.4 13.7	7.8 19.8	1/2"
015 - 024	in cm	2.4 6.1	4.8 12.2	8.5 21.6	3/4"
030	in cm	2.4 6.1	5.4 13.7	9.7 24.6	3/4"
036	in cm	2.4 6.1	5.4 13.7	9.7 24.6	3/4"
042 - 048	in cm	2.4 6.1	5.4 13.7	9.7 24.6	1"
060	in cm	2.4 6.1	5.4 13.7	10.7 27.2	1"

Vertical Upflow Model	Electrical Knockouts				
	J 1/2"	K 1/2"	L 3/4"		
	Low Voltage	External Pump	Power Supply		
009 - 012	in cm	3.5 8.9	5.5 14.0	8.2 20.8	
015 - 024	in cm	3.5 8.9	7.5 19.1	10.2 25.9	
030	in cm	5.7 14.5	9.7 24.6	12.2 31.0	
036	in cm	5.7 14.5	9.7 24.6	12.2 31.0	
042 - 048	in cm	5.7 14.5	9.7 24.6	12.2 31.0	
060	in cm	8.1 20.6	11.7 29.7	14.2 36.1	


Vertical Upflow Model	Discharge Connection Duct Flange Installed (+/- 0.10 in, +/- 2.5mm)					Return Connection Using Return Air Opening				
	M	N	O Supply Width	P Supply Depth	Q	R	S Return Depth	T Return Height	U	
009 - 012	in cm	10.6 26.9	6.8 17.3	5.8 14.7	8.0 20.3	6.0 15.2	2.2 5.6	17.1 43.4	9.3 23.6	1.0 2.5
015 - 024	in cm	7.2 18.3	3.8 9.7	14.0 35.6	14.0 35.6	4.3 10.9	2.2 5.6	17.1 43.4	15.3 38.9	1.0 2.5
030	in cm	7.2 18.3	5.8 14.7	14.0 35.6	14.0 35.6	4.3 10.9	2.5 5.6	21.1 53.6	19.2 48.8	1.0 2.5
036	in cm	7.2 18.3	5.8 14.7	14.0 35.6	14.0 35.6	4.3 10.9	2.2 5.6	21.1 53.6	19.2 48.8	1.0 2.5
042 - 048	in cm	7.2 18.3	5.8 14.7	14.0 35.6	14.0 35.6	4.3 10.9	2.2 5.6	21.1 53.6	27.2 69.1	1.0 2.5
060	in cm	6.2 15.7	6.3 16.0	18.0 45.7	18.0 45.7	5.1 13.1	2.2 5.6	26.1 66.3	27.2 69.1	1.0 2.5

ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateMaster's Customer Service Department at 1-405-745-6000 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products. The latest version of this document is available at [climatemaster.com](http://climatemaster.com).





### GR - Vertical Upflow Dimensional Data



Top View-Right Return



Top View-Left Return

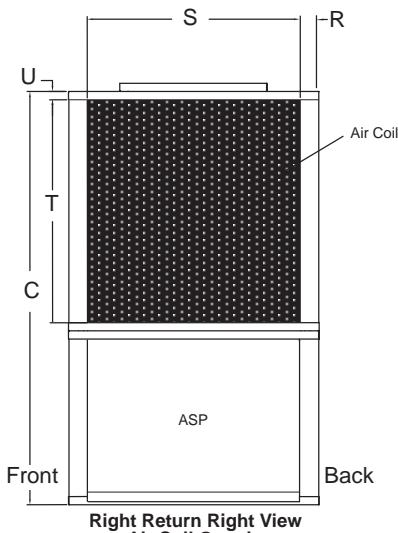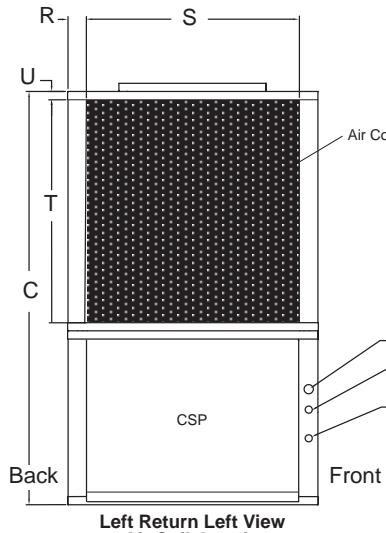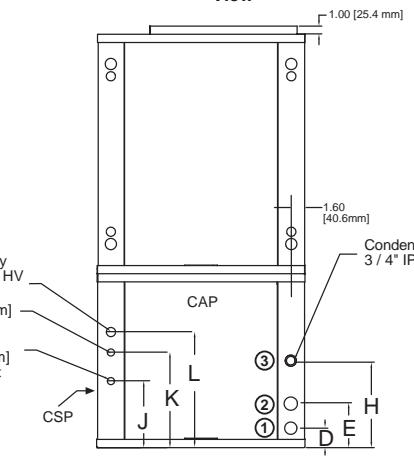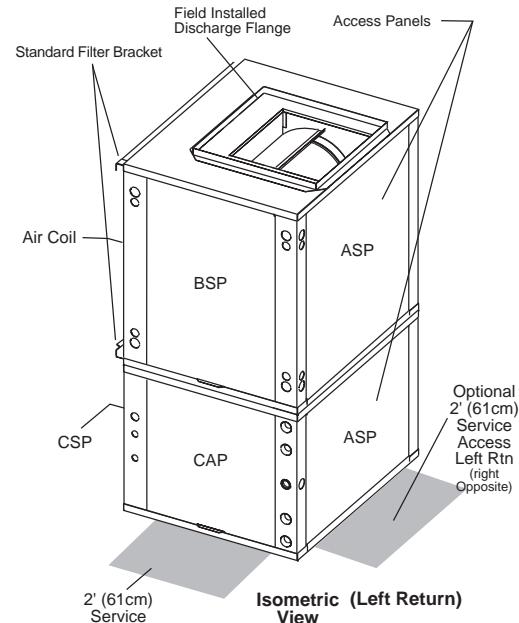Right Return Right View  
- Air Coil OpeningLeft Return Left View  
- Air Coil Opening

# GR Series 60Hz - R22 Submittal Data Eng/I-P



## Corner Weights for GRH Series Units

Model		Total	Left-Front*	Right-Front*	Left-Back*	Right-Back*
GRH006	Lbs	110	30	24.5	30	25.5
	kg	49.90	13.61	11.11	13.61	11.57
GRH009	Lbs	112	30.5	25	30.5	26
	kg	50.80	13.83	11.34	13.83	11.79
GRH012	Lbs	121	33	27	33	28
	kg	54.88	14.97	12.25	14.97	12.70
GRH015	Lbs	147	40	33	40	34
	kg	66.68	18.14	14.97	18.14	15.42
GRH019	Lbs	169	46	38	46	39
	kg	76.66	20.87	17.24	20.87	17.69
GRH024	Lbs	193	52.5	43	52.5	45
	kg	87.54	23.81	19.50	23.81	20.41
GRH030	Lbs	219	60	49	60	50
	kg	99.34	27.22	22.23	27.22	22.68
GRH036	Lbs	229	62.5	51	62.5	53
	kg	103.87	28.35	23.13	28.35	24.04
GRH042	Lbs	257	70	57.5	70	59.5
	kg	116.57	31.75	26.08	31.75	26.99
GRH048	Lbs	267	72.5	60	72.5	62
	kg	121.11	32.89	27.22	32.89	28.12
GRH060	Lbs	323	88	72	88	75
	kg	146.51	39.92	32.66	39.92	34.02

\*Front is control box end.

## Electrical Data

Model	Voltage Code	Voltage	Min/Max Voltage	All GR Units			Standard GR Units			GR Units with Secondary Pump				
				Compressor			Fan Motor FLA	Total Unit FLA	Min Circuit Amps	Max Fuse/HACR	Pump FLA	Total Unit FLA	Min Circuit Amps	Max Fuse/HACR
				QTY	RLA	LRA								
GRH 006	G	208-230/60/1	197/254	1	2.9	17.7	0.40	3.3	4.0	15	0.43	3.7	4.5	15
	E	265/60/1	239/292	1	2.5	15.0	0.40	2.9	3.5	15	N/A	N/A	N/A	N/A
GRH/V 009	G	208-230/60/1	197/254	1	3.9	22.2	0.80	4.7	5.7	15	0.43	5.1	6.1	15
	E	265/60/1	239/292	1	3.3	18.8	0.70	4.0	4.8	15	N/A	N/A	N/A	N/A
GRH/V 012	G	208-230/60/1	197/254	1	5.3	27.9	0.80	6.1	7.4	15	0.8	6.9	8.2	15
	E	265/60/1	239/292	1	4.2	22.2	0.70	4.9	6.0	15	0.7	5.6	6.7	15
GRH/V 015	G	208-230/60/1	197/254	1	5.9	29.0	1.00	6.9	8.4	15	0.43	7.3	8.8	15
	E	265/60/1	239/292	1	5.4	27.0	0.90	6.3	7.6	15	N/A	N/A	N/A	N/A
GRH/V 019	G	208-230/60/1	197/254	1	8.6	49.0	1.10	9.7	11.9	20	0.8	10.5	12.7	20
	E	265/60/1	239/292	1	8.1	44.0	0.90	9.0	11.0	15	0.7	9.7	11.7	15
GRH/V 024	G	208-230/60/1	197/254	1	9.6	50.0	1.30	10.9	13.3	20	0.8	11.7	14.1	20
	E	265/60/1	239/292	1	8.8	55.0	1.60	10.4	12.6	20	0.7	11.1	13.3	20
	H	208-230/60/3	197/254	1	6.7	51.0	1.30	8.0	9.7	15	0.8	8.8	10.5	15
	F*	460/60/3*	414/506	1	3.5	25.0	0.90	4.4	5.3	15	0.7	5.1	6.0	15
GRH/V 030	G	208-230/60/1	197/254	1	11.2	61.0	1.90	13.1	15.9	25	0.8	13.9	16.7	25
	E	265/60/1	239/292	1	9.8	58.0	1.70	11.5	14.0	20	0.7	12.2	14.7	20
	H	208-230/60/3	197/254	1	6.9	55.0	1.90	8.8	10.5	15	0.8	9.6	11.3	15
	F*	460/60/3*	414/506	1	3.6	28.0	1.00	4.6	5.5	15	0.7	5.3	6.2	15
GRH/V 036	G	208-230/60/1	197/254	1	14.4	82.0	3.00	17.4	21.0	35	0.8	18.2	21.8	35
	E	265/60/1	239/292	1	12.2	64.0	2.70	14.9	18.0	30	0.7	15.6	18.7	30
	H	208-230/60/3	197/254	1	9.4	65.5	3.00	12.4	14.8	20	0.8	13.2	15.6	20
	F*	460/60/3*	414/506	1	4.4	33.0	1.70	6.1	7.2	15	0.7	6.8	7.9	15
GRH/V 042	G	208-230/60/1	197/254	1	16.2	96.0	3.00	19.2	23.3	35	0.8	20.0	24.1	40
	H	208-230/60/3	197/254	1	10.3	75.0	3.00	13.3	15.9	25	0.8	14.1	16.7	25
	F*	460/60/3*	414/506	1	4.3	40.0	1.70	6.0	7.1	15	0.7	6.7	7.8	15
	N	575/60/3	518/633	1	3.7	31.0	1.50	5.2	6.0	15	N/A	N/A	N/A	N/A
GRH/V 048	G	208-230/60/1	197/254	1	18.3	102.0	3.40	21.7	26.3	40	1.07	22.8	27.3	45
	H	208-230/60/3	197/254	1	12.6	91.0	3.40	16.0	19.2	30	1.07	17.1	20.2	30
	F*	460/60/3*	414/506	1	5.7	42.0	1.80	7.5	8.9	15	1.07	8.6	10.0	15
	N	575/60/3	518/633	1	4.7	39.0	1.40	6.1	7.3	15	N/A	N/A	N/A	N/A
GRH/V 048 High Static	G	208-230/60/1	197/254	1	18.3	102.0	4.9	23.2	27.8	45	1.07	24.3	28.8	45
	H	208-230/60/3	197/254	1	12.6	91.0	4.9	17.5	20.7	30	1.07	18.6	21.7	30
	F*	460/60/3*	414/506	1	5.7	42.0	2.5	8.2	9.6	15	1.07	9.3	10.7	15
	N	575/60/3	518/633	1	4.7	39.0	1.9	6.6	7.6	15	N/A	N/A	N/A	N/A
GRH/V 060	G	208-230/60/1	197/254	1	25.6	170.0	4.90	30.5	36.9	60	1.07	31.6	38.0	60
	H	208-230/60/3	197/254	1	14.7	124.0	4.90	19.6	23.3	35	1.07	20.7	24.3	35
	F*	460/60/3*	414/506	1	7.4	59.6	2.50	9.9	11.8	15	1.07	11.0	12.8	20
	N	575/60/3	518/633	1	5.9	49.4	1.90	7.8	9.3	15	N/A	N/A	N/A	N/A

HACR circuit breaker in USA only

All fuses Class RK-5

\* NEUTRAL CONNECTION REQUIRED! All F Voltage (460 vac) units with internal secondary circulators require a four wire power supply with neutral. Internal secondary circulators are rated 265 vac and are wired between one hot leg and neutral.

ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateMaster's Customer Service Department at 1-405-745-6000 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products. The latest version of this document is available at [climatemaster.com](http://climatemaster.com).

# GR Series 60Hz - R22 Submittal Data Eng/I-P



## GR Series Wiring Diagram Matrix


Only CXM and DXM diagrams, with a representative diagram of LON and MPC Options are presented in this submittal. Other diagrams can be located online at [climatemaster.com](http://climatemaster.com) using the part numbers presented below.

Model	Refrigerant	Wiring Diagram Part Number	Electrical	Control	DDC	Agency
GR Series Single Phase	R22	96B0006N01	208-230/60/1, 265/60/1, 220-240/50/1	CXM	-	ETL
	R22 & R407C	96B0006N06			-	CE
	R22	96B0006N03			LON	ETL
	R22	96B0006N09			MPC	ETL
	R22 & R407C	96B0006N11			MPC	CE
	R22	96B0006N02		DXM	-	ETL
	R22 & R407C	96B0006N05			-	CE
	R22	96B0006N04			LON	ETL
	R22	96B0006N10			MPC	ETL
GR Series Three Phase (230 Style)	R22	96B0007N01	208-230/60/3, 220-240/50/3	CXM	-	ETL
	R22	96B0007N03			LON	ETL
	R22	96B0007N06			MPC	ETL
	R22	96B0007N02		DXM	-	ETL
	R22	96B0007N04			LON	ETL
	R22	96B0007N07			MPC	ETL
GR Series Three Phase (460 Style)	R22	96B0008N01	460/60/3, 575/60/3, 380-420/50/3	CXM	-	ETL
	R22 & R407C	96B0008N06			-	CE
	R22	96B0008N03			LON	ETL
	R22	96B0008N08			MPC	ETL
	R22	96B0008N02		DXM	-	ETL
	R22 & R407C	96B0008N05			-	CE
	R22	96B0008N04			LON	ETL
	R22	96B0008N09			MPC	ETL

All wiring diagrams available at [climatemaster.com](http://climatemaster.com). R407C submittals will only contain CE Mark wiring diagrams



## Typical Wiring Diagram Single Phase GR Units With CXM Controller

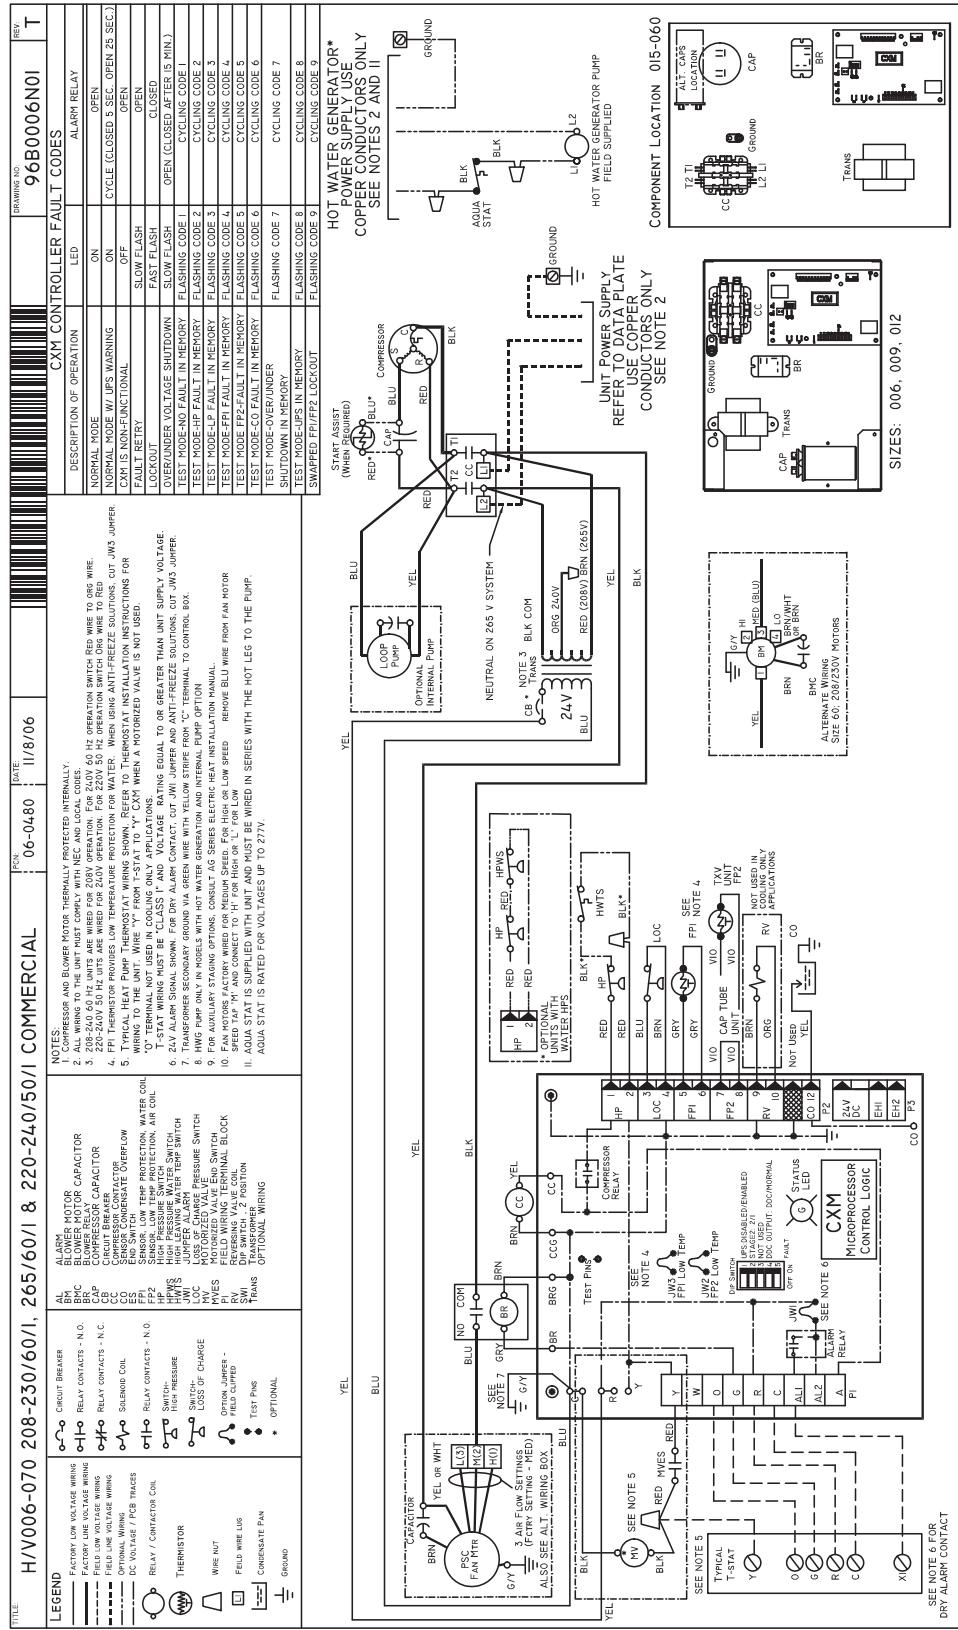


ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateMaster's Customer Service Department at 1-405-745-6000 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products. The latest version of this document is available at [climatemaster.com](http://climatemaster.com).

# GR Series 60Hz - R22 Submittal Data Eng/IP




## Typical Wiring Diagram Single Phase GR Units With DXM Controller

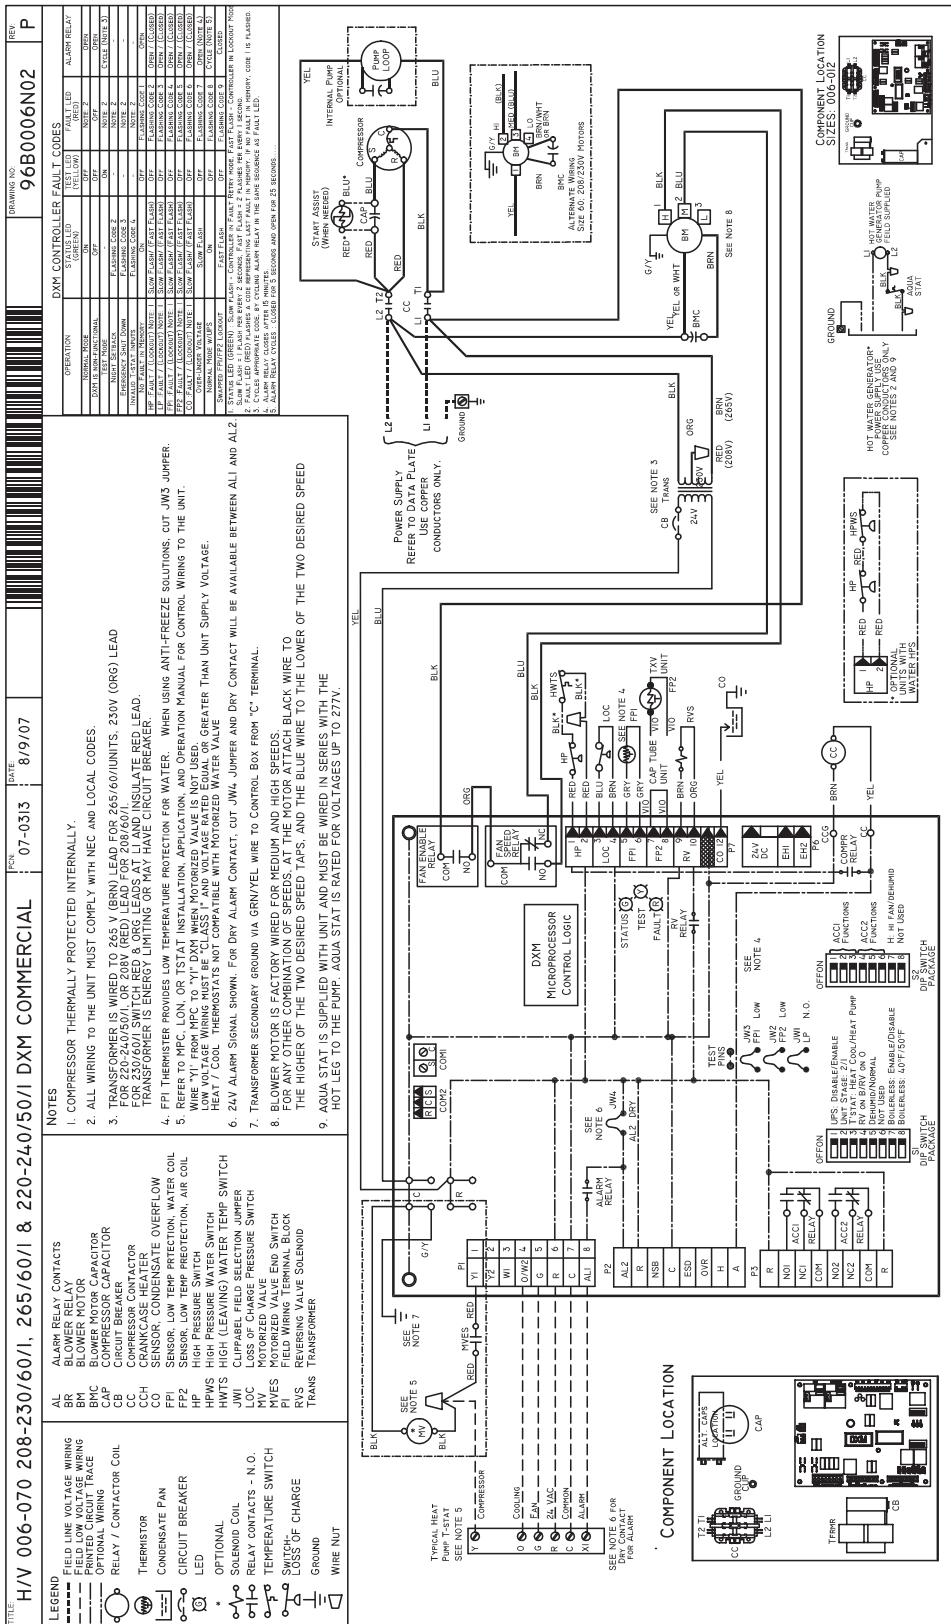

ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateMaster's Customer Service Department at 1-405-745-6000 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products. The latest version of this document is available at [climatemaster.com](http://climatemaster.com).

## Typical Wiring Diagram Three Phase 208/230V GR Units With CXM Controller

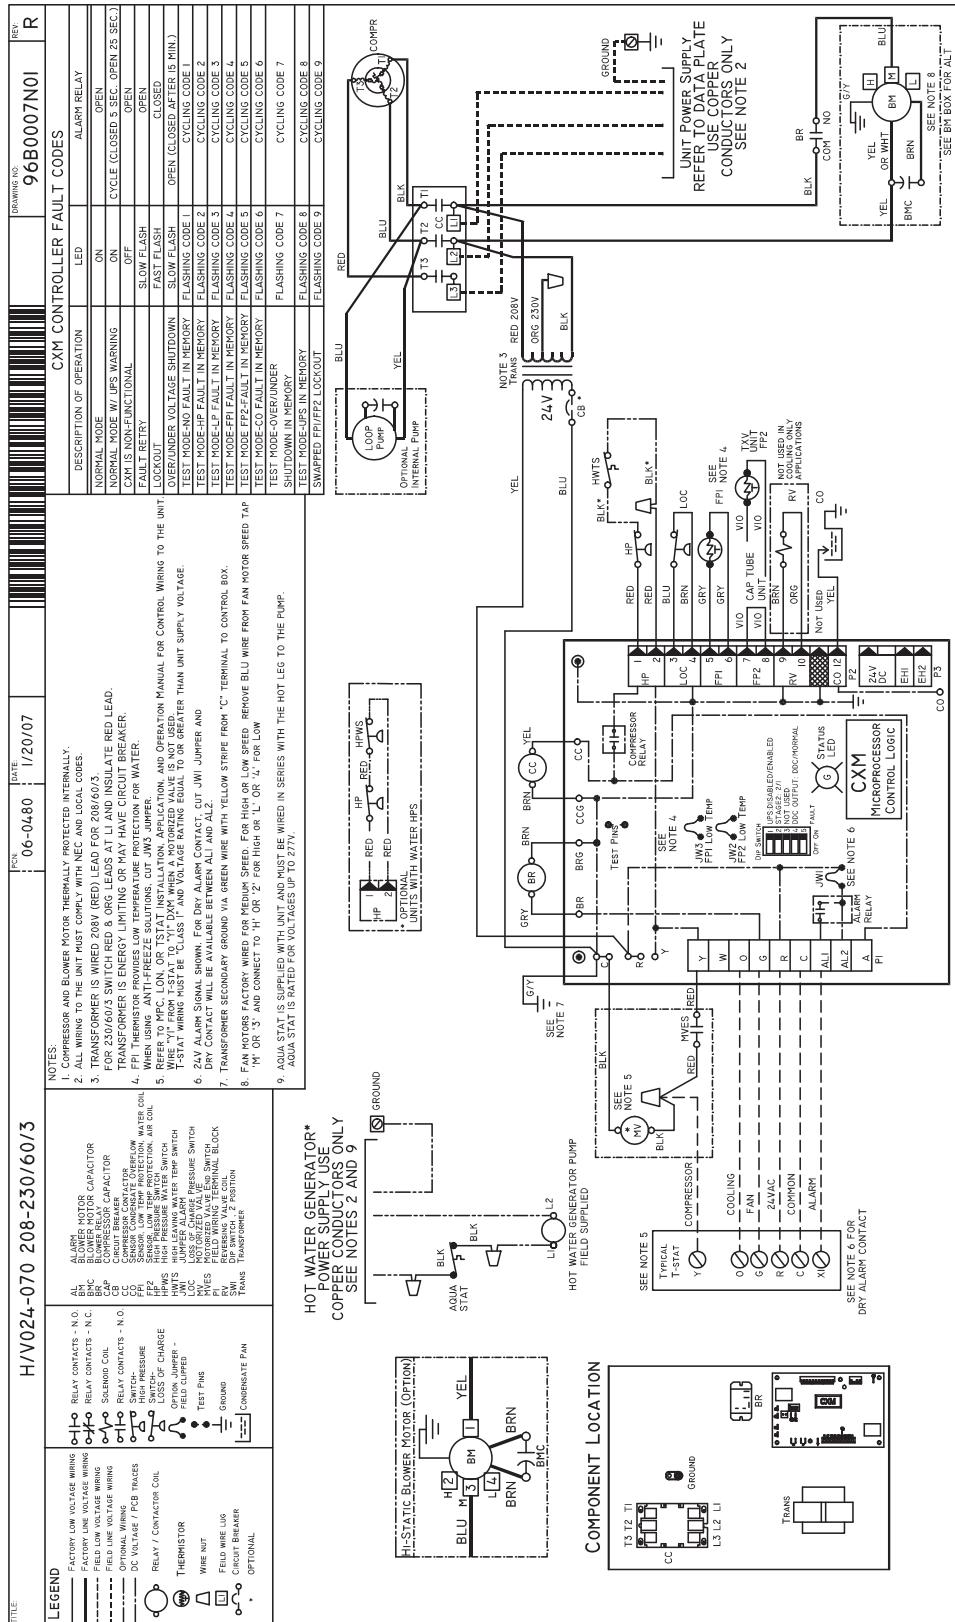


ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateMaster's Customer Service Department at 1-405-745-6000 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products. The latest version of this document is available at [climatemaster.com](http://climatemaster.com).

GR Series 60Hz - R22 Submittal Data Eng/I/P




## Typical Wiring Diagram Three Phase 208/230V GR Units With DXM Controller

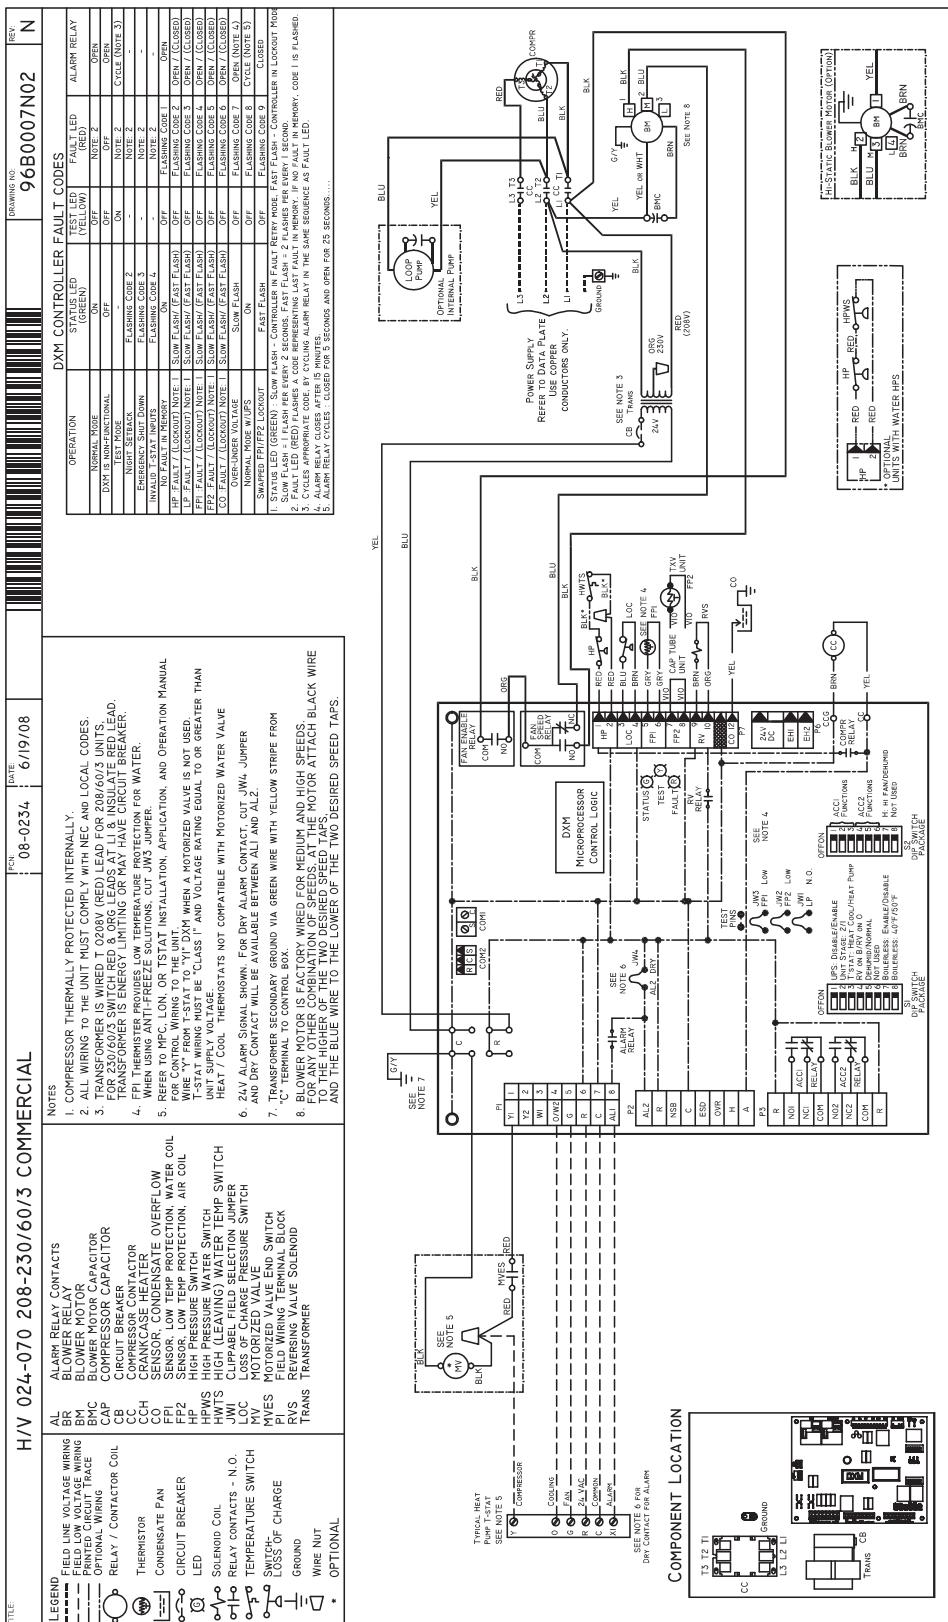

ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateMaster's Customer Service Department at 1-405-745-6000 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products. The latest version of this document is available at [climatemaster.com](http://climatemaster.com).

## Typical Wiring Diagram Three Phase 460/575V GR Units With CXM Controller

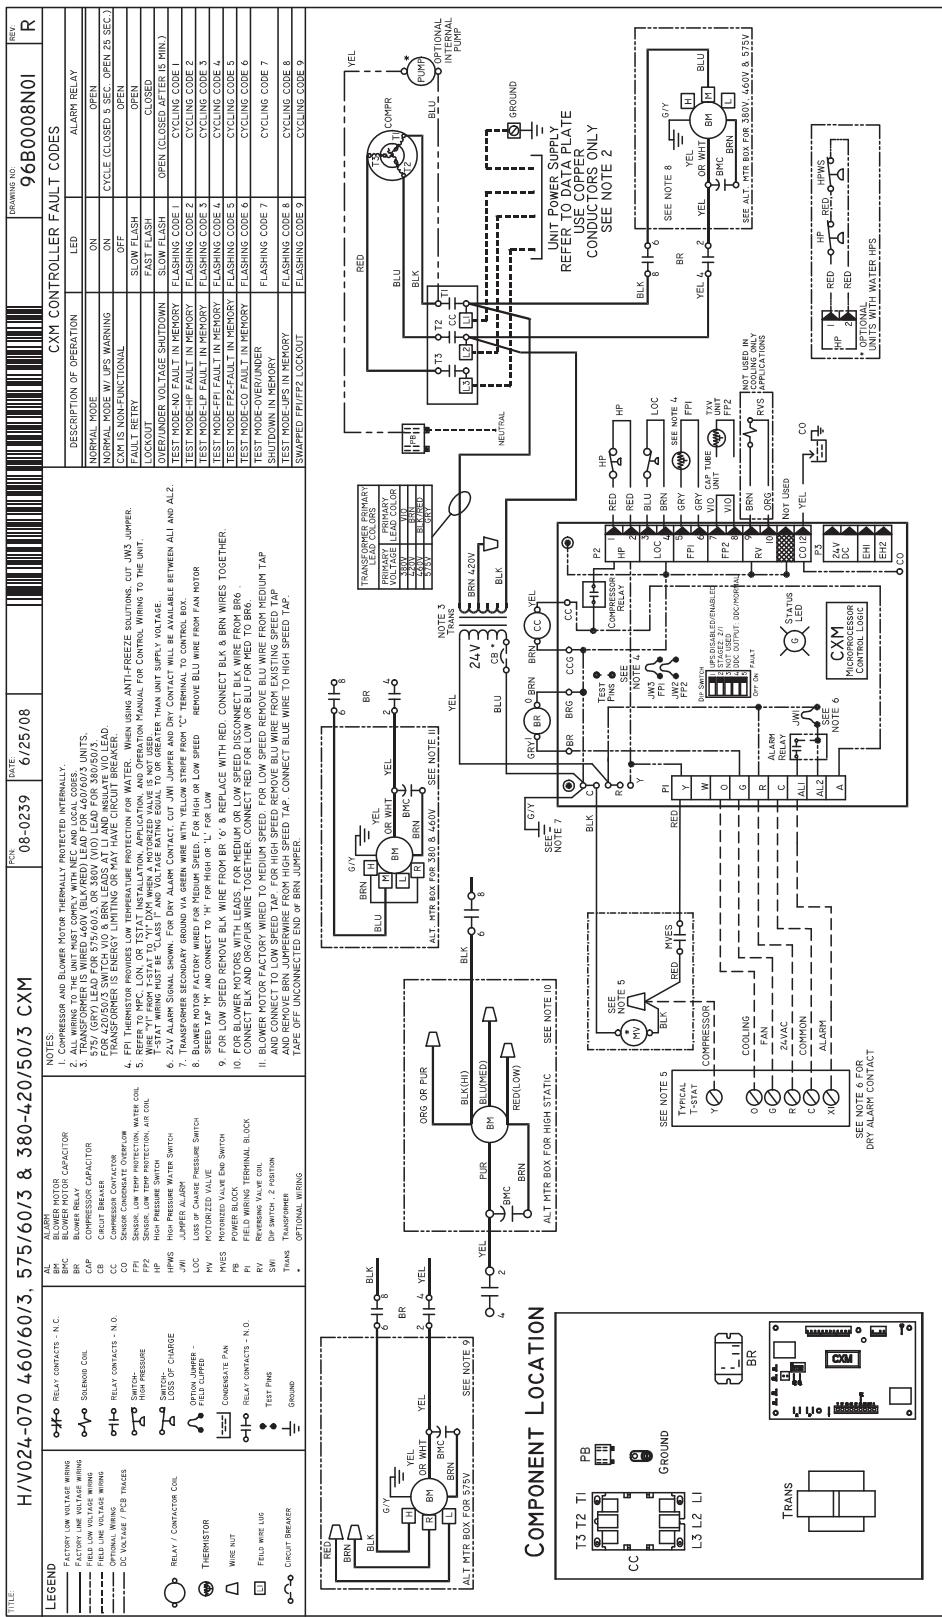


ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateMaster's Customer Service Department at 1-405-745-6000 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products. The latest version of this document is available at [climatemaster.com](http://climatemaster.com).

GR Series 60Hz - R22 Submittal Data Eng/I-P




## Typical Wiring Diagram Three Phase 460/575V GR Units With DXM Controller

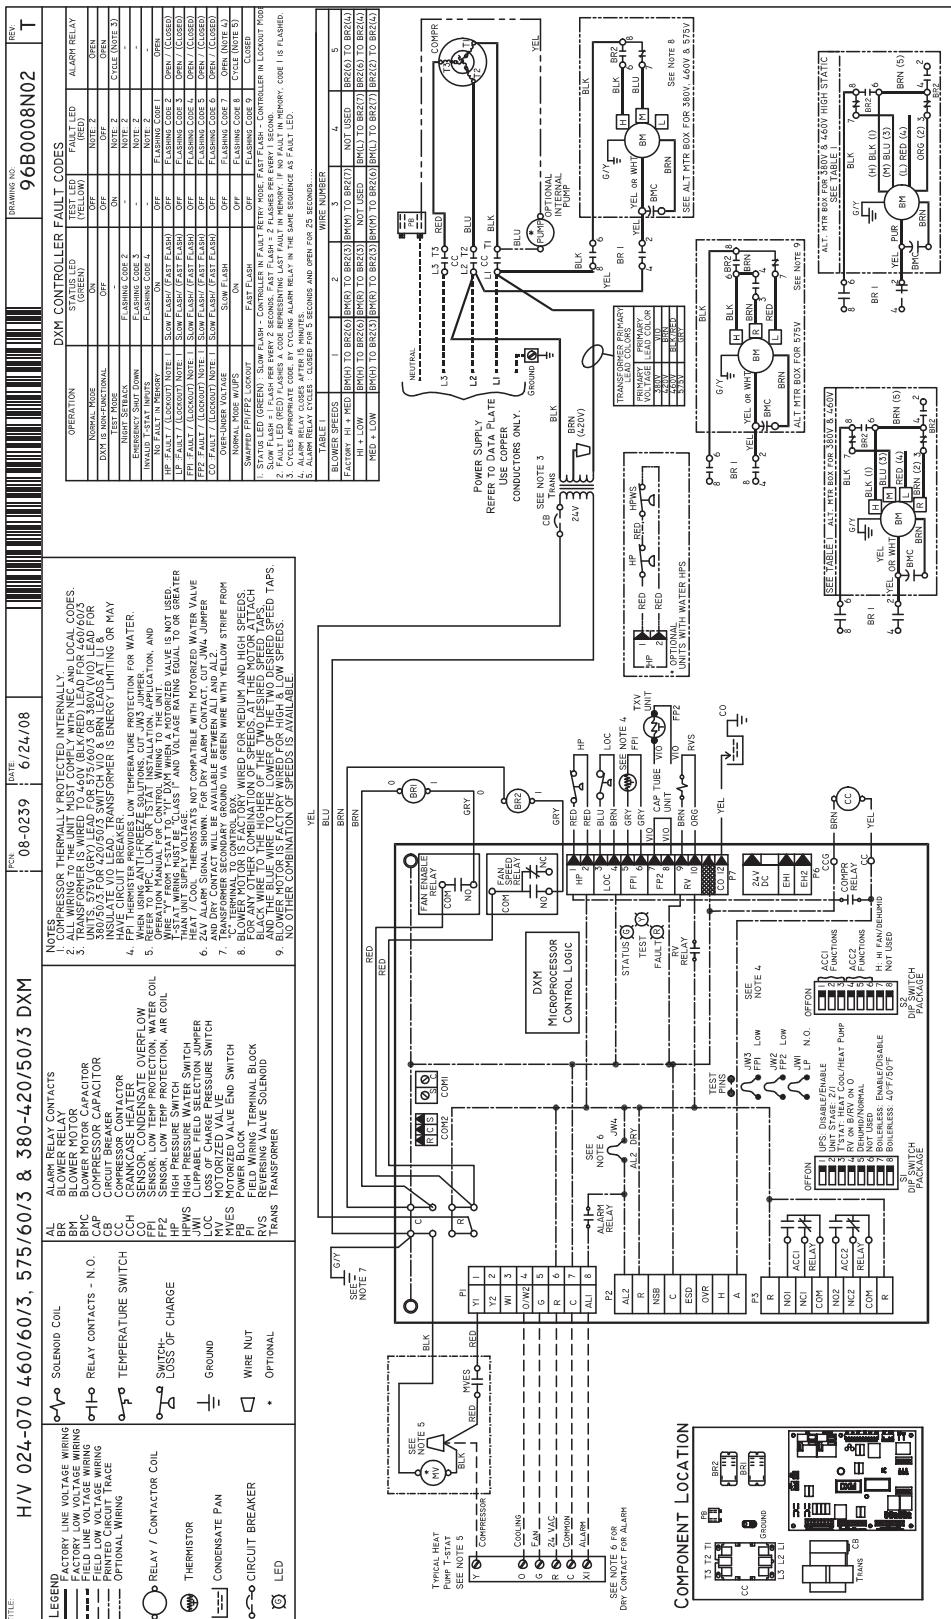

ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateMaster's Customer Service Department at 1-405-745-6000 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products. The latest version of this document is available at [climatemaster.com](http://climatemaster.com).

## Typical Wiring Diagram Three Phase 460/575V GR Units With CXM & LON Controller

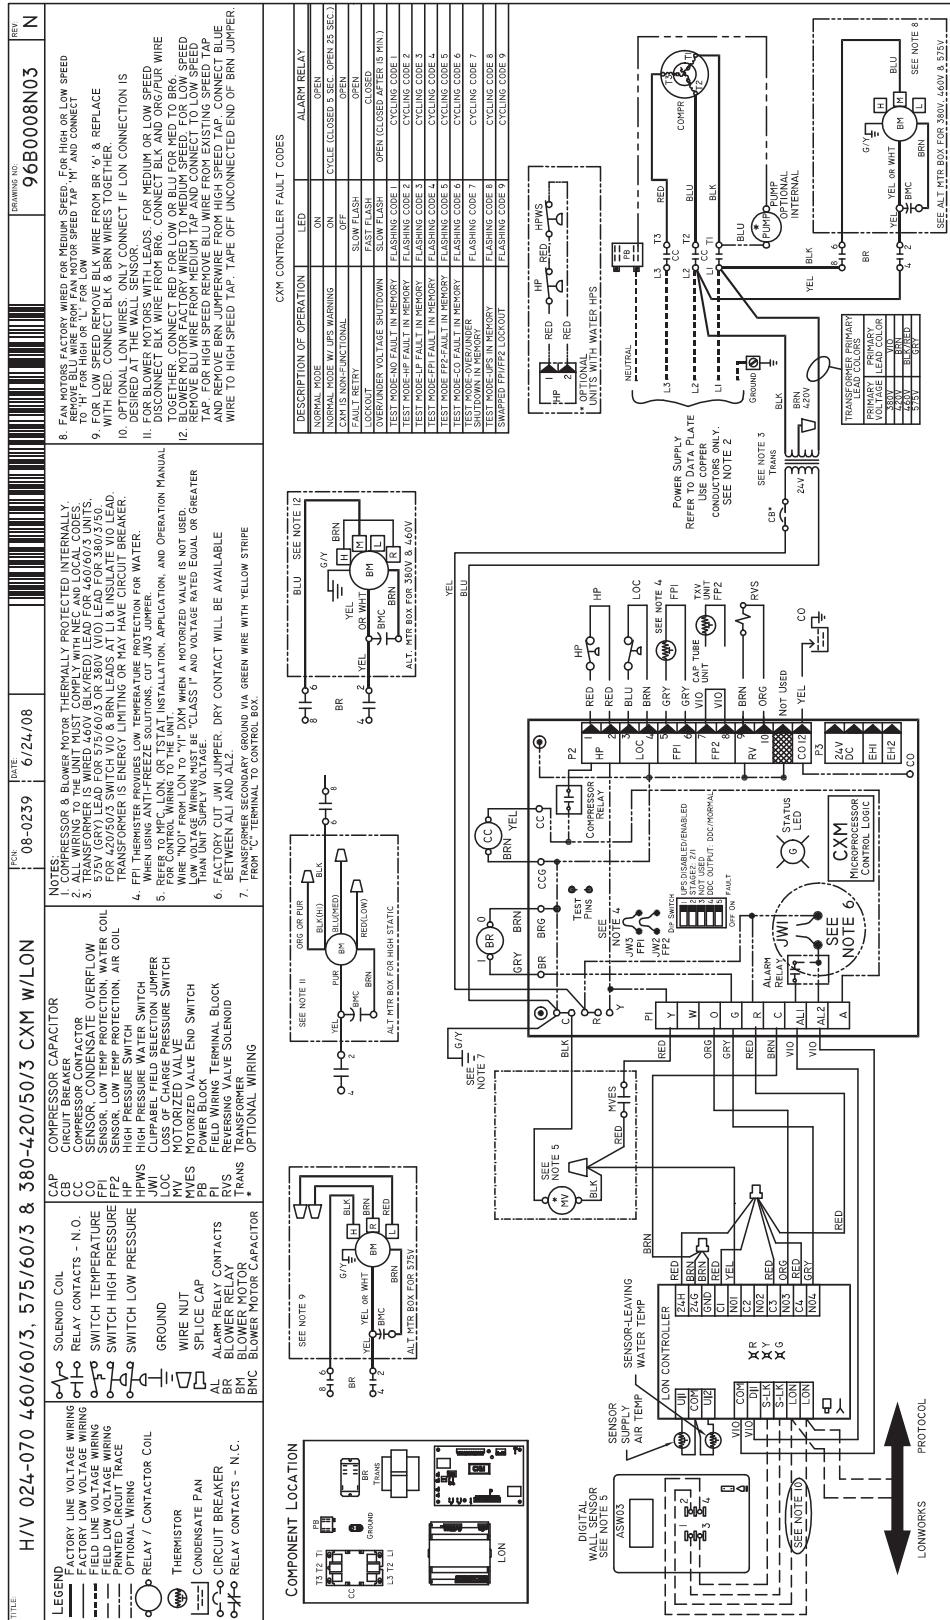


ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateMaster's Customer Service Department at 1-405-745-6000 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products. The latest version of this document is available at [climatemaster.com](http://climatemaster.com).

GR Series 60Hz - R22 Submittal Data Eng/I-P




## Typical Wiring Diagram Three Phase 460/575V GR Units With DXM & LON Controller

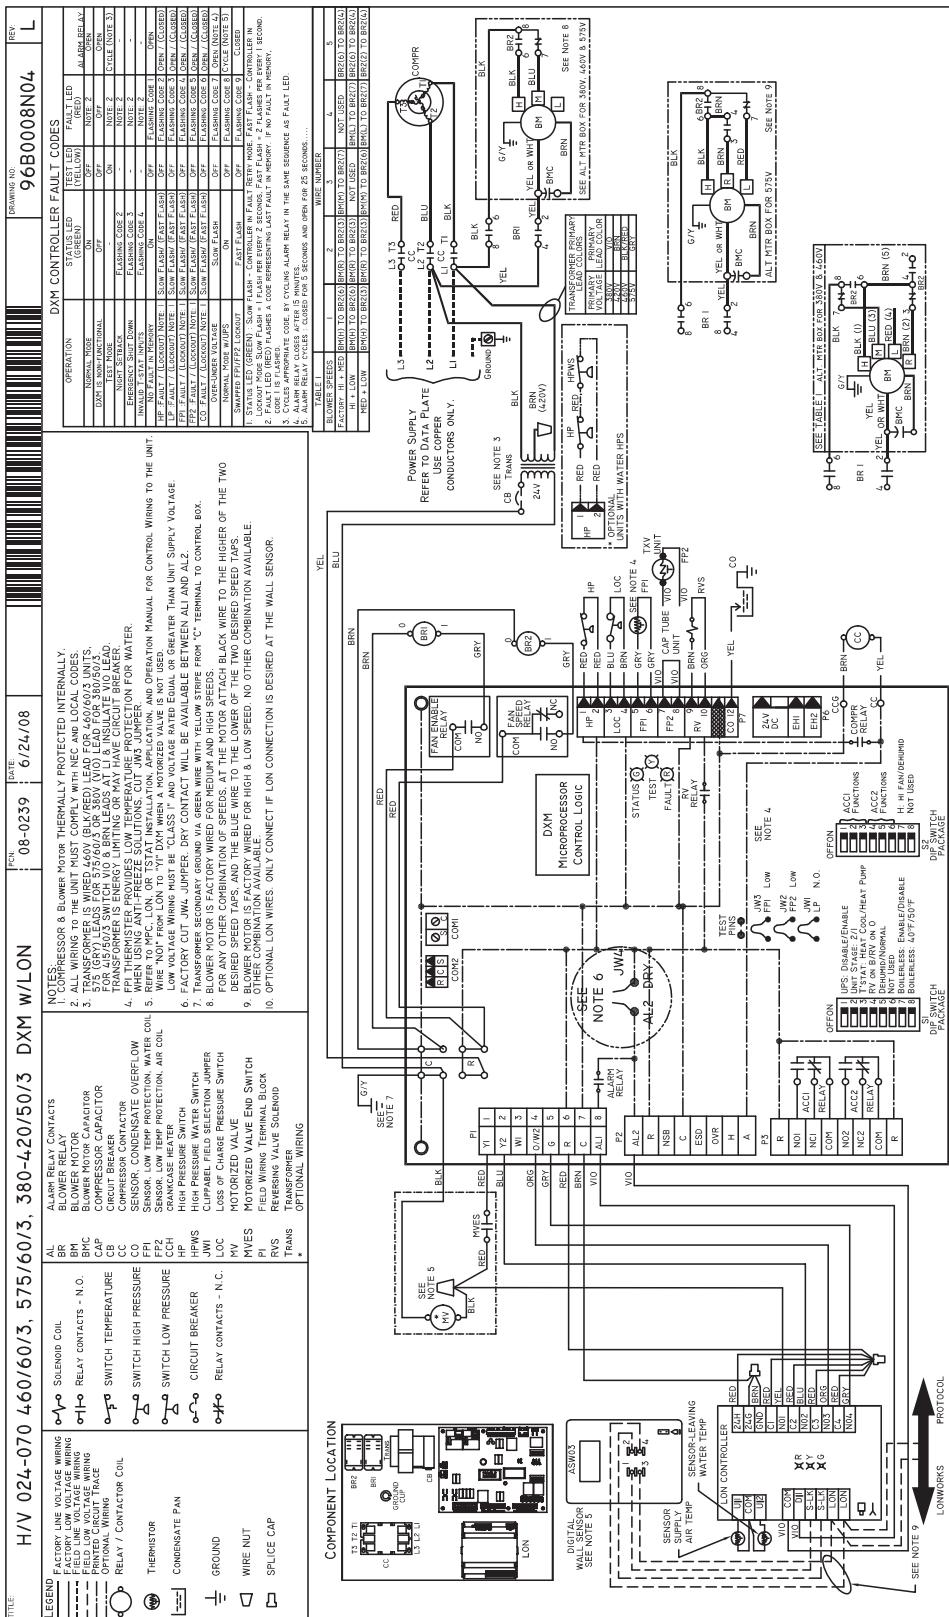

ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateMaster's Customer Service Department at 1-405-745-6000 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products. The latest version of this document is available at [climatemaster.com](http://climatemaster.com).

## Typical Wiring Diagram Three Phase 460/575V GR Units With CXM & MPC Controller

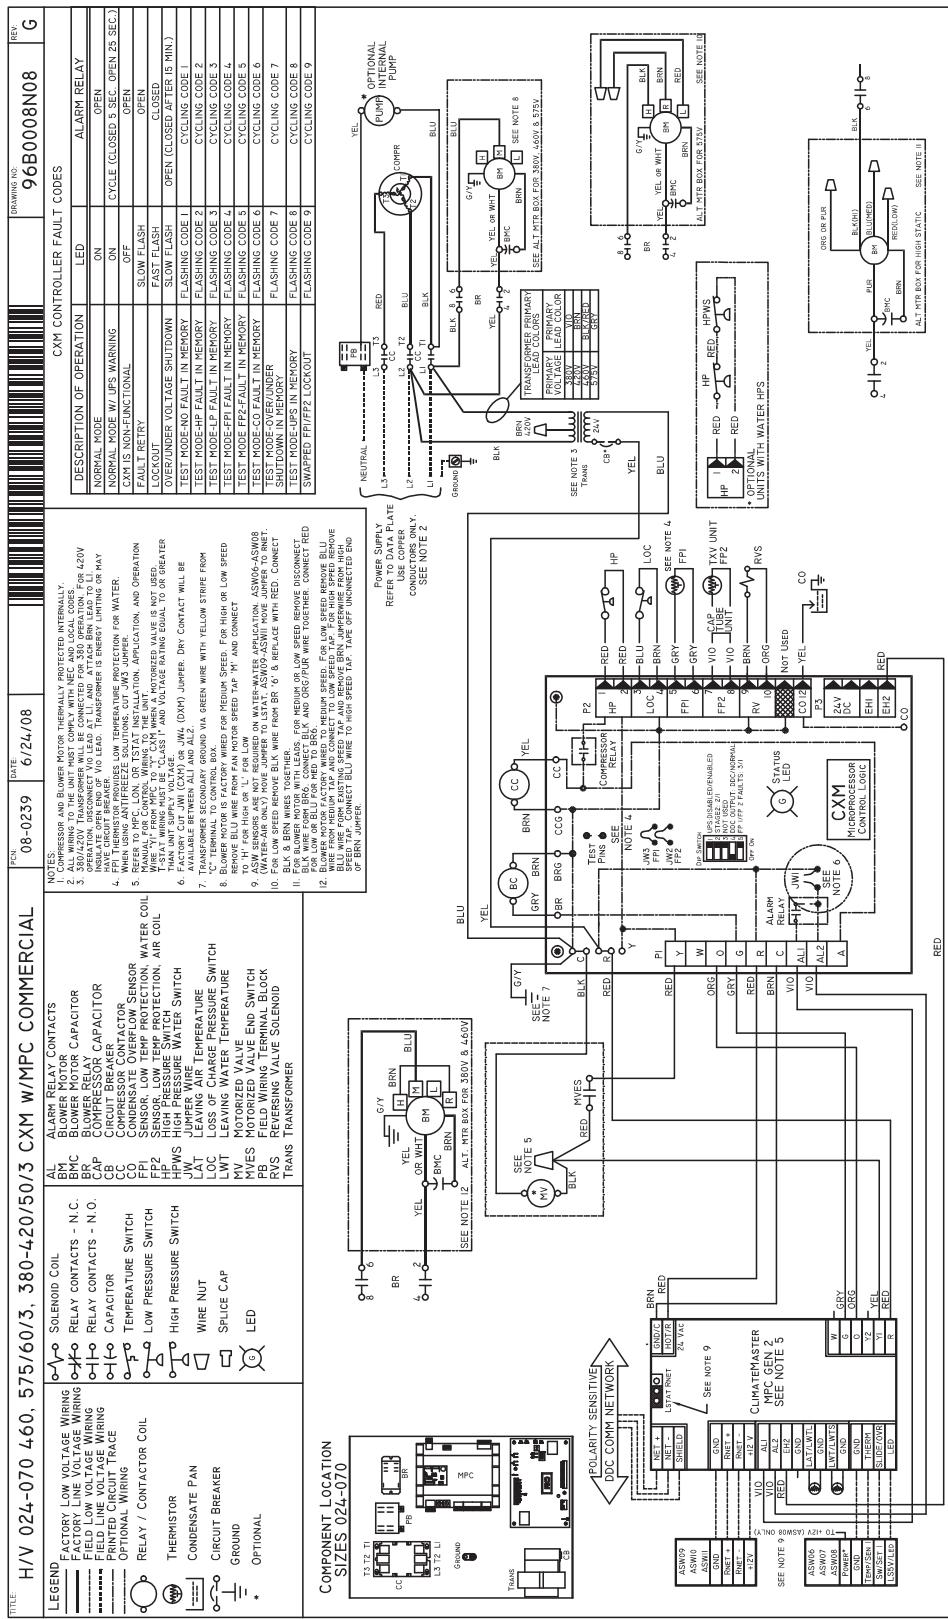


ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateMaster's Customer Service Department at 1-405-745-6000 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products. The latest version of this document is available at [climatemaster.com](http://climatemaster.com).

GR Series 60Hz - R22 Submittal Data Eng/I-P



## Typical Wiring Diagram Three Phase 460/575V GR Units With DXM & MPC Controller

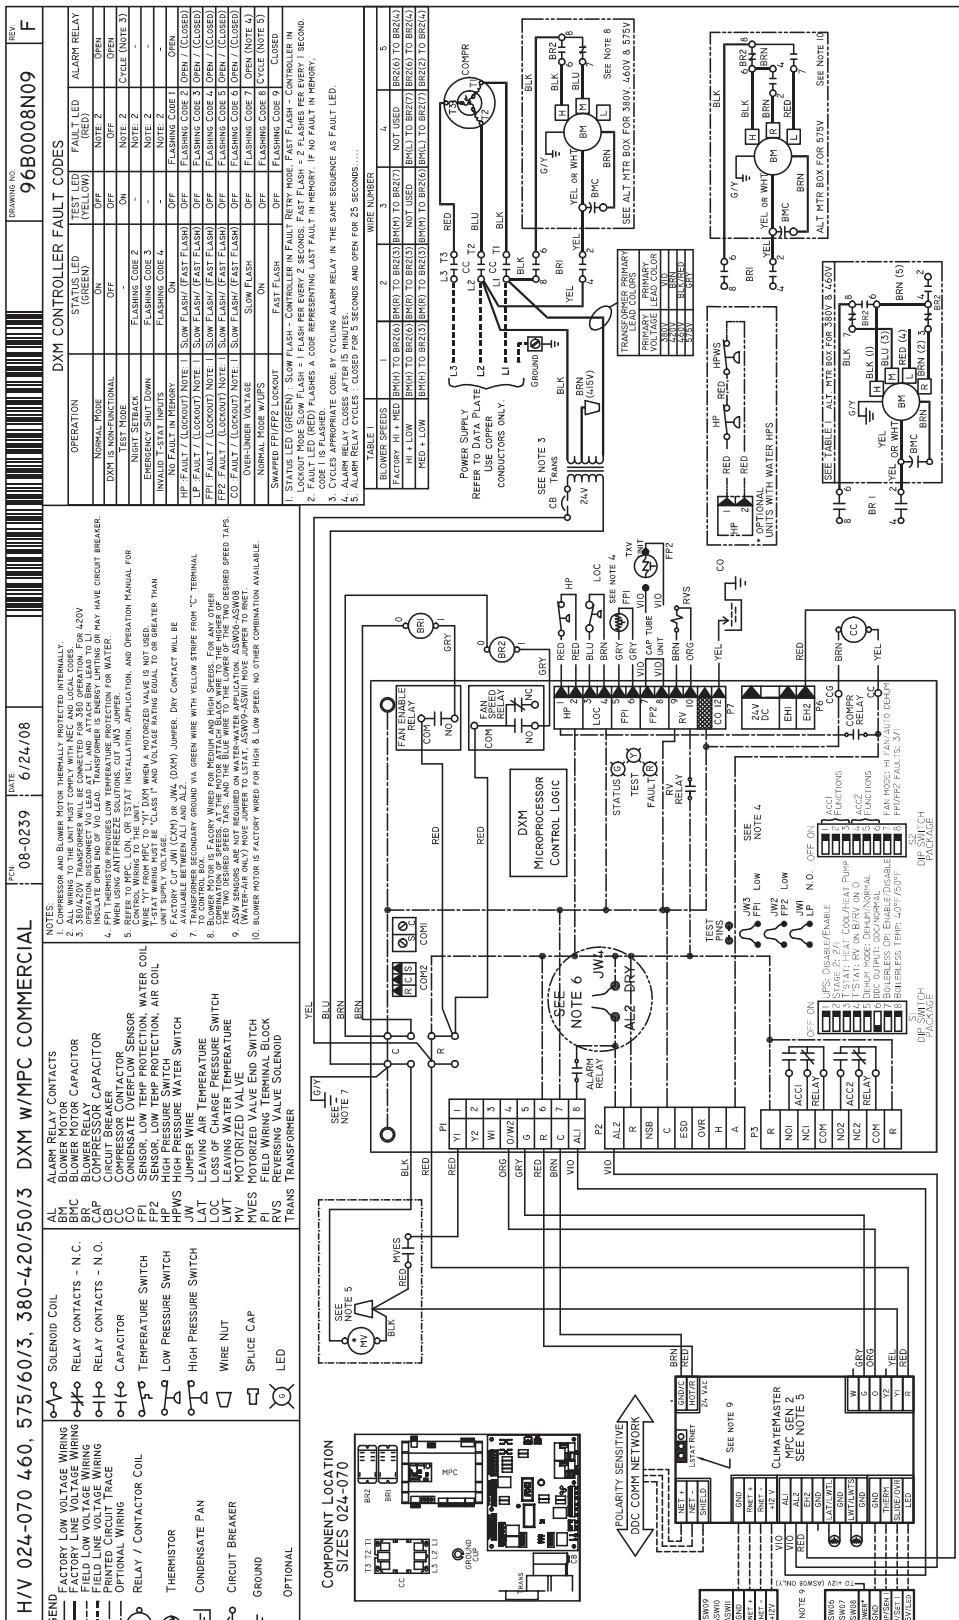

ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateMaster's Customer Service Department at 1-405-745-6000 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products. The latest version of this document is available at [climatemaster.com](http://climatemaster.com).

## Genesis Standard (GR) Series 60Hz Engineering Specifications Rev.: 08/21/08      Page 1

**General:**

Furnish and install ClimateMaster "Genesis" Water Source Heat Pumps, as indicated on the plans. Equipment shall be completely assembled, piped and internally wired. Capacities and characteristics as listed in the schedule and the specifications that follow.

**Horizontal / Vertical Water Source Heat Pumps:**

Units shall be supplied completely factory built for an entering water temperature range from 20° to 110°F (-6.7° to 43.3°C) as standard. Equivalent units from other manufacturers can be proposed provided approval to bid is given 10 days prior to bid closing. All equipment listed in this section must be rated and certified in accordance with American Refrigeration Institute / International Standards Organization (ARI / ISO) and Environmental Testing Laboratories for United States and Canada (ETL-US-C). The units shall have ARI / ISO and ETL-US-C labels. All units shall be fully quality tested by factory run testing under normal operating conditions and water flow rates as described herein. Quality control system shall automatically perform via computer: triple leak check, pressure tests, evacuate and accurately charge system, perform detailed heating and cooling mode tests, and quality cross check all operational and test conditions to pass/fail data base. Detailed report card will ship with each unit displaying all test performance data. Note: If unit fails on any cross check, system shall not be allowed unit to ship. Serial numbers will be recorded by factory and furnished to contractor on report card for ease of unit warranty status. **Units tested without water flow are not acceptable.**

**Basic Construction:**

Horizontal Units shall have one of the following air flow arrangements: Left Inlet/Straight (Right) Discharge; Right Inlet/Straight (Left) Discharge; Left Inlet/Back Discharge; or Right Inlet/Back Discharge as shown on the plans. Units must have the ability to be field convertible from straight to back or back to straight discharge with no additional parts or unit structure modification. Horizontal units will have factory installed hanger brackets with rubber isolation grommets packaged separately.

Vertical Units shall have one of the following air flow arrangements: Left Return/Top Discharge, Right Return/Top Discharge, as shown on the plans.

**If units with these arrangements are not used, the contractor is responsible for any extra costs incurred by other trades.** All units (horizontal and vertical) must have a minimum of three access panels for serviceability of compressor compartment. **Units having only one access panel to compressor/heat exchangers/expansion device/refrigerant piping shall not be acceptable.**

The heat pumps shall be fabricated from heavy gauge galvanized steel. All interior surfaces shall be lined with 1/2 inch (12.7mm) thick, dual density, 1-3/4 lb/ft<sup>3</sup> (28 kg/m<sup>3</sup>) acoustic type glass fiber insulation. Insulation placement shall be designed in a manner that will eliminate any exposed edges to prevent the introduction of glass fibers into the air stream.

Vertical heat pumps shall be fabricated from heavy gauge galvanized steel with powder coat paint finish. The color will be Polar Ice. Both sides of the steel shall be painted for added protection.

Standard cabinet panel insulation must meet NFPA 90A requirements, air erosion and mold growth limits of UL-181, stringent fungal resistance test per ASTM-C1071 and ASTM G21, and shall meet zero level bacteria growth per ASTM G22. **Unit insulation must meet these stringent requirements or unit(s) will not be accepted.**

All horizontal units to have factory installed 1" (25.4mm) discharge air duct collars, 1" (25.4mm) filter rails with 1" (25.4mm) filters factory installed, and factory installed unit-mounting brackets. Vertical units to have field installed discharge air duct collar, shipped loose and 1" (25.4mm) filter rails with 1" (25.4mm) filters factory installed. **If units with these factory installed provisions are not used, the contractor is responsible for any extra costs to field install these provisions, and/or the extra costs for his sub-contractor to install these provisions.**

All units must have an insulated panel separating the fan compartment from the compressor compartment. Units with the compressor in the air stream are not acceptable. Units shall have a factory installed 1 inch (25.4mm) wide filter bracket for filter removal from either side. Units shall have a 1 inch (25.4mm) thick throwaway type glass fiber filter. The contractor shall purchase one spare set of filters and replace factory shipped filters on completion of start-up. Filters shall be standard sizes. If units utilize non-standard filter sizes then the contractor shall provide 12 spare filters for each unit.

Cabinets shall have separate holes and knockouts for entrance of line voltage and low voltage control wiring. All factory-installed wiring passing through factory knockouts and openings shall be protected from sheet metal edges at openings by plastic ferrules. Supply and return water connections shall be copper IPT fittings, and shall be securely mounted flush to the cabinet corner post allowing for connection to a flexible hose without the use of a back-up wrench. **Water connections that protrude through the cabinet or require the use of a backup wrench shall not be allowed.** All water connections and electrical knockouts must be in the compressor compartment corner post as to not interfere with the serviceability of unit. **Contractor shall be responsible for** ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateMaster's Customer Service Department at 1-405-745-6000 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products. The latest version of this document is available at [climatemaster.com](http://climatemaster.com).



## Genesis Standard (GR) Series 60Hz Engineering Specifications Rev.: 08/21/08      Page 2

**any extra costs involved in the installation of units that do not have this feature.** Contractor must ensure that units can be easily removed for servicing and coordinate locations of electrical conduit and lights with the electrical contractor.

Option: Contractor shall install 2-inch (50.8mm) filter brackets and 2 inch(50.8mm) glass fiber throwaway filters on all units.

Option: UltraQuiet package shall consist of a discharge muffler (except rotary compressors) and high technology sound attenuating material that is strategically applied to the compressor and air handling compartment casings and fan scroll in addition to the standard ClimaQuiet system design, to further dampen and attenuate sound transmissions.

Option: The unit will be supplied with cupro nickel coaxial water to refrigerant heat exchanger.

Option: The unit will be supplied with internally factory mounted two-way water valve for variable speed pumping requirements. A factory-mounted or field-installed high pressure switch shall be installed in the water piping to disable compressor operation in the event water pressures build due to water freezing in the piping system.

Option: The unit will be supplied with internally factory mounted automatic water flow regulators.

Option: The unit will be supplied with internally mounted secondary pump for primary/secondary applications, specifically one-pipe systems.

Option: The unit shall be supplied with extended range Insulation option, which adds closed cell insulation to internal water lines, and provides insulation on suction side refrigeration tubing including refrigerant to water heat exchanger.

Option: The refrigerant to air heat exchanger shall be "electro-coated" with a low cure cathodic epoxy material a minimum of 0.4 mils thick (0.4 – 1.5 mils range) on all surfaces. The black colored coating shall provide a minimum of 1000 hours salt spray protection per ASTM B117-97 on all galvanized end plates and copper tubing, and a minimum of 2000 hours of salt spray on all aluminum fins. The material shall be formulated without the inclusion of any heavy metals and shall exhibit a pencil hardness of 2H (ASTM D3363-92A), crosshatch adhesion of 4B-5B (ASTM D3359-95), and impact resistance of 160 in-lbs (184 kg-cm) direct (ASTM D2794-93).

### Fan and Motor Assembly:

Blower shall have inlet rings to allow removal of wheel and motor from one side without removing housing. Units shall have a direct-drive centrifugal fan. The fan motor shall be 3-speed (2-speed for 575V), permanently lubricated, PSC type, with internal thermal overload protection. Units supplied without permanently lubricated motors must provide external oilers for easy service. The fan motor on small and medium size units (006-042) shall be isolated from the fan housing by a torsionally flexible motor mounting system with rubber type grommets to inhibit vibration induced high noise levels associated with "hard wire belly band" motor mounting. The fan motor on larger units (048 & 060) shall be isolated with flexible rubber type isolation grommets only. The fan and motor assembly must be capable of overcoming the external static pressures as shown on the schedule. Airflow / Static pressure rating of the unit shall be based on a wet coil and a clean filter in place. **Ratings based on a dry coil and / or no filter, or on an ESP less than 0.25 in w.g. (6.35 mm w.g.) shall NOT be acceptable.**

Option: High static motor (models GRH048 or GRV048).

### Refrigerant Circuit:

Units shall have a sealed refrigerant circuit including a high efficiency scroll, rotary or reciprocating compressor designed for heat pump operation, a thermostatic expansion valve for refrigerant metering, an enhanced corrugated aluminum lanced fin and rifled copper tube refrigerant to air heat exchanger, reversing valve, coaxial (tube in tube) refrigerant to water heat exchanger, and safety controls including a high pressure switch, low pressure switch (loss of charge), water coil low temperature sensor, and air coil low temperature sensor. Access fittings shall be factory installed on high and low pressure refrigerant lines to facilitate field service. Activation of any safety device shall prevent compressor operation via a microprocessor lockout circuit. The lockout circuit shall be reset at the thermostat or at the contractor supplied disconnect switch. **Units that cannot be reset at the thermostat shall not be acceptable.**

Hermetic compressors shall be internally sprung. The compressor shall have a dual level vibration isolation system. The compressor will be mounted on computer selected vibration isolation springs to a large heavy gauge compressor mounting tray plate, which is then isolated from the cabinet base with rubber grommets for maximized vibration attenuation. Compressor shall have thermal overload protection. Compressor shall be located in an insulated compartment away from air stream to minimize sound transmission.

ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateMaster's Customer Service Department at 1-405-745-6000 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products. The latest version of this document is available at [climatemaster.com](http://climatemaster.com).

## Genesis Standard (GR) Series 60Hz Engineering Specifications Rev.: 08/21/08 Page 3

Refrigerant to air heat exchangers shall utilize enhanced corrugated lanced aluminum fins and rifled copper tube construction rated to withstand 450 PSIG (3101 kPa) refrigerant working pressure. Refrigerant to water heat exchangers shall be of copper inner water tube and steel refrigerant outer tube design, rated to withstand 450 PSIG (3101 kPa) working refrigerant pressure and 450 PSIG (3101 kPa) working water pressure. The refrigerant to water heat exchanger shall be "electro-coated" with a low cure cathodic epoxy material a minimum of 0.4 mils thick (0.4 – 1.5 mils range) on all surfaces. The black colored coating shall provide a minimum of 1000 hours salt spray protection per ASTM B117-97 on all external steel and copper tubing. The material shall be formulated without the inclusion of any heavy metals and shall exhibit a pencil hardness of 2H (ASTM D3363-92A), crosshatch adhesion of 4B-5B (ASTM D3359-95), and impact resistance of 160 in-lbs (184 kg-cm) direct (ASTM D2794-93).

Refrigerant metering shall be accomplished by thermostatic expansion valve only. Expansion valves shall be dual port balanced types with external equalizer for optimum refrigerant metering. Units shall be designed and tested for operating ranges of entering water temperatures from 20° to 110°F (-6.7° to 43.3°C). Reversing valve shall be four-way solenoid activated refrigerant valve, which shall default to heating mode should the solenoid fail to function. If the reversing valve solenoid defaults to cooling mode, an additional low temperature thermostat must be provided to prevent over-cooling an already cold room.

### Drain Pan:

The drain pan shall be constructed of galvanized steel and have a powder coat paint application to further inhibit corrosion. This corrosion protection system shall meet the stringent 1000 hour salt spray test per ASTM B117. If plastic type material is used, it must be HDPE (High Density Polyethylene) to avoid thermal cycling shock stress failure over the lifetime of the unit. Stainless Steel materials are also acceptable. Drain pan shall be fully insulated. Drain outlet shall be located at pan as to allow complete and unobstructed drainage of condensate. Drain outlet for horizontal units shall be connected from pan directly to IPT fitting.

**No hidden internal tubing extensions from pan outlet extending to unit casing (that can create drainage problems) will be accepted.** The unit as standard will be supplied with solid-state electronic condensate overflow protection. **Mechanical float switches will NOT be accepted.**

Vertical units shall be furnished with a PVC IPT condensate drain connection and an internal factory installed condensate trap. **If units without an internal trap are used, the contractor is responsible for any extra costs to field install these provisions, and/or the extra costs for his sub-contractor to install these provisions.**

### Electrical:

A control box shall be located within the unit compressor compartment and shall contain a 50VA transformer, 24 volt activated, 2 or 3 pole compressor contactor, terminal block for thermostat wiring and solid-state controller for complete unit operation. Reversing valve and fan motor wiring shall be routed through this electronic controller. Units shall be name-plated for use with time delay fuses or HACR circuit breakers. Unit controls shall be 24 Volt and provide heating or cooling as required by the remote thermostat / sensor.

### Solid State Control System (CXM):

Units shall have a solid-state control system. **Units utilizing electro-mechanical control shall not be acceptable.** The control system microprocessor board shall be specifically designed to protect against building electrical system noise contamination, EMI, and RFI interference. The control system shall interface with a heat pump type thermostat. The control system shall have the following features:

- a. Anti-short cycle time delay on compressor operation.
- b. Random start on power up mode.
- c. Low voltage protection.
- d. High voltage protection.
- e. Unit shutdown on high or low refrigerant pressures.
- f. Unit shutdown on low water temperature.
- g. Condensate overflow electronic protection.
- h. Option to reset unit at thermostat or disconnect.
- i. Automatic intelligent reset. Unit shall automatically reset the unit 5 minutes after trip if the fault has cleared. If a fault occurs 3 times sequentially without thermostat meeting temperature, then lockout requiring manual reset will occur.
- j. Ability to defeat time delays for servicing.
- k. Light emitting diode (LED) on circuit board to indicate high pressure, low pressure, low voltage, high voltage, low water/air temperature cut-out, condensate overflow, and control voltage status.
- l. The low-pressure switch shall not be monitored for the first 120 seconds after a compressor start command to prevent nuisance safety trips.
- m. 24V output to cycle a motorized water valve or other device with compressor contactor.

ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateMaster's Customer Service Department at 1-405-745-6000 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products. The latest version of this document is available at [climatemaster.com](http://climatemaster.com).



## Genesis Standard (GR) Series 60Hz

### Engineering Specifications Rev.: 08/21/08      Page 4

- n. Unit Performance Sentinel (UPS). The UPS warns when the heat pump is running inefficiently.
- o. Water coil low temperature sensing (selectable for water or anti-freeze).
- p. Air coil low temperature sensing.

**NOTE: Units not providing the 8 safety protections of anti-short cycle, low voltage, high voltage, high refrigerant pressure, low pressure (loss of charge), air coil low temperature cut-out, water coil low temperature cut-out, and condensate overflow protections will not be accepted.**

#### Option: Enhanced solid state control system (DXM)

This control system features two stage control of cooling and two stage control of heating modes for exacting temperature and dehumidification purposes.

This control system coupled with a multi-stage thermostat will better dehumidify room air by automatically running the heat pump's fan at lower speed on the first stage of cooling thereby implementing low sensible heat ratio cooling. On the need for higher cooling performance the system will activate the second stage of cooling and automatically switch the fan to the higher fan speed setting. This system may be further enhanced with a humidistat. **Units not having automatic low sensible heat ratio cooling will not be accepted;** as an alternate a hot gas reheat coil may be provided with control system for automatic activation.

Control shall have all of the above mentioned features of the CXM control system along with the following expanded features:

- a. Removable thermostat connector.
- b. Night setback control.
- c. Random start on return from night setback.
- d. Minimized reversing valve operation (Unit control logic shall only switch the reversing valve when cooling is demanded for the first time. The reversing valve shall be held in this position until the first call for heating, ensuring quiet operation and increased valve life.).
- e. Override temperature control with 2-hour timer for room occupant to override setback temperature at the thermostat.
- f. Dry contact night setback output for digital night setback thermostats.
- g. Ability to work with heat pump or heat/cool (Y, W) type thermostats.
- h. Ability to work with heat pump thermostats using O or B reversing valve control.
- i. Emergency shutdown contacts.
- j. Boilerless system heat control at low loop water temperature.
- k. Ability to allow up to 3 units to be controlled by one thermostat.
- l. Relay to operate an external damper.
- m. Ability to automatically change fan speed from multistage thermostat.
- n. Relay to start system pump.
- o. 75 VA control transformer. Control transformer shall have load side short circuit and overload protection via a built in circuit breaker.

#### Remote Service Sentinel (CXM/DXM):

Solid state control system shall have ability to communicate with thermostat with fault light to display (at the thermostat) the unit status, fault status, and specific fault condition, as well as retrieve previously stored fault that caused unit shutdown. The Remote Service Sentinel allows building maintenance personnel or service personnel to diagnose unit from the wall thermostat. The control board shall provide a signal to the thermostat fault light, indicating a lockout. Upon cycling the G (fan) input 3 times within a 60 second time period, the fault light shall display the specific code as indicated by a sequence of flashes. A detailed flashing code shall be provided at the thermostat LED to display unit status and specific fault status such as over/under voltage fault, high pressure fault, low pressure fault, low water temperature fault, condensate overflow fault, etc. **Units that do not provide this remote service sentinel shall not be acceptable.**

#### Option: Lonworks interface system

Units shall have all the features listed above (either CXM or DXM) and the control board will be supplied with a LONWORKS interface board, which is LONMark certified. This will permit all units to be daisy chained via a 2-wire twisted pair shielded cable. The following points must be available at a central or remote computer location:

- a. Space temperature
- b. Leaving water temperature
- c. Discharge air temperature
- d. Command of space temperature setpoint
- e. Cooling status

ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateMaster's Customer Service Department at 1-405-745-6000 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products. The latest version of this document is available at [climatemaster.com](http://climatemaster.com).

**Genesis Standard (GR) Series 60Hz  
Engineering Specifications Rev.: 08/21/08      Page 5**

- f. Heating status
- g. Low temperature sensor alarm
- h. Low pressure sensor alarm
- i. High pressure switch alarm
- j. Condensate sensor alarm
- k. Hi/low voltage alarm
- l. Fan "ON/AUTO" position of space thermostat as specified above
- m. Unoccupied / occupied command
- n. Cooling command
- o. Heating command
- p. Fan "ON / AUTO" command
- q. Fault reset command
- r. Itemized fault code revealing reason for specific shutdown fault (any one of 7)

This option also provides the upgraded 75VA control transformer with load side short circuit and overload protection via a built in circuit breaker.

**Option: MPC (Multiple Protocol Control) interface system**

Units shall have all the features listed above (either CXM or DXM) and the control board will be supplied with a Multiple Protocol interface board. Available protocols are BACnet MS/TP, Modbus, or Johnson Controls N2. The choice of protocol shall be field selectable/changeable via the use of a simple selector switch. Protocol selection shall not require any additional programming or special external hardware or software tools. This will permit all units to be daisy chain connected by a 2-wire twisted pair shielded cable. The following points must be available at a central or remote computer location:

- a. Space temperature
- b. Leaving water temperature
- c. Discharge air temperature
- d. Command of space temperature setpoint
- e. Cooling status
- f. Heating status
- g. Low temperature sensor alarm
- h. Low pressure sensor alarm
- i. High pressure switch alarm
- j. Condensate overflow alarm
- k. Hi/low voltage alarm
- l. Fan "ON/AUTO" position of space thermostat as specified above
- m. Unoccupied / occupied command
- n. Cooling command
- o. Heating command
- p. Fan "ON / AUTO" command
- q. Fault reset command
- r. Itemized fault code revealing reason for specific shutdown fault (any one of 7)

This option also provides the upgraded 75VA control transformer with load side short circuit and overload protection via a built in circuit breaker.

**Warranty:**

Climate Master shall warranty equipment for a period of 12 months from start up or 18 months from shipping (which ever occurs first).

*Option: Extended 4-year compressor warranty covers compressor for a total of 5 years.*

*Option: Extended 4-year refrigeration circuit warranty covers coils, reversing valve, expansion valve and compressor for a total of 5 years.*

*Option: Extended 4-year control board warranty covers the CXM/DXM control board for a total of 5 years.*

**FIELD INSTALLED OPTIONS**

ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateMaster's Customer Service Department at 1-405-745-6000 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products. The latest version of this document is available at [climatemaster.com](http://climatemaster.com).



## Genesis Standard (GR) Series 60Hz Engineering Specifications Rev.: 08/21/08      Page 6

### Hose Kits:

All units 120000 BTUH (35 kW) and below shall be connected with hoses. The hoses shall be 2 feet (61cm) long, braided stainless steel; fire rated hoses complete with adapters. Only fire rated hoses will be accepted.

### Valves:

The following valves are available and will be shipped loose:

- a. Ball valve; bronze material, standard port full flow design, IPT connections.
- b. Ball valve with memory stop and PT Port; standard port full flow design, IPT connections.
- c. "Y" strainer with cap; bronze material, IPT connections.
- d. "Y" strainer with blowdown valve; bronze material, IPT connections.
- e. Motorized water valve; slow acting, 24v, IPT connections.

### Hose Kit Assemblies:

The following assemblies ship with the valves already assembled to the hose described:

- a. Supply and return hoses having ball valve with PT port.
- b. Supply hose having ball valve with PT port; return hose having automatic flow regulator valve with PT ports, and ball valve.
- c. Supply hose having "Y" strainer with blowdown valve, and ball valve with PT port; return hose having automatic flow regulator with PT ports, and ball valve.

### Thermostats:

The thermostat shall be a ClimateMaster mechanical or electronic type thermostat as selected below with the described features:

- a. Single Stage Standard Manual Changeover (ATM11C01)

Thermostat shall be a single-stage, vertical mount, manual changeover with HEAT-OFF-COOL system switch and fan ON-AUTO switch. Thermostat shall have a mechanical temperature indicator and set point indication. Thermostat shall only require 4 wires for connection. Mercury bulb thermostats are not acceptable.

- b. Single Stage Digital Manual Changeover with Two-Speed Fan Control (ATM11C03) – DXM and PSC Fan required

Thermostat shall be a single-stage, digital, manual changeover with HEAT-OFF-COOL system switch, fan ON-AUTO switch, and fan LO-HI switch. Thermostat shall have an LCD display with temperature and set-point(s) in °F or °C. The Thermostat shall provide permanent memory of set-point(s) without batteries. A fault LED shall be provided to display specific fault condition. Thermostat shall come standard with remote temperature sensor, but may be operated with internal sensor if desired via installation of a jumper.

- c. Single Stage Digital Auto or Manual Changeover (ATA11U01)

Thermostat shall be a single-stage, digital, auto or manual changeover with HEAT-OFF-COOL-AUTO system switch and fan ON-AUTO switch. Thermostat shall have an LCD display with temperature and set-point(s) in °F or °C. The Thermostat shall provide permanent memory of set-point(s) without batteries. A fault LED shall be provided to display specific fault condition. Thermostat shall provide temperature display offset for custom applications.

- d. Single Stage Digital Automatic Changeover with Two-Speed Fan Control (ATA11C04) – DXM and PSC Fan required

Thermostat shall be a single-stage, digital, auto or manual changeover with HEAT-OFF-COOL-AUTO system switch, fan ON-AUTO switch, and fan LO-HI switch. Thermostat shall have an LCD display with temperature and set-point(s) in °F or °C. The Thermostat shall provide permanent memory of set-point(s) without batteries. A fault LED shall be provided to display specific fault condition. Thermostat shall come standard with remote temperature sensor, but may be operated with internal sensor if desired via installation of a jumper.

- e. Multistage Digital Automatic Changeover (ATA22U01)

Thermostat shall be multi-stage (2H/2C), manual or automatic changeover with HEAT-OFF-COOL-AUTO system settings and fan ON-AUTO settings. Thermostat shall have an LCD display with temperature, set-point(s), mode, and status indication. The temperature indication shall be selectable for °F or °C. The thermostat shall provide permanent memory of set-point(s) without batteries. A fault LED shall be provided to indicate specific fault condition(s). Thermostat shall provide temperature display offset for custom applications. Thermostat shall allow unit to provide better dehumidification with optional DXM controller by automatically using lower fan speed on stage 1 cooling (higher latent cooling) as main cooling mode, and automatically shifting to high speed fan on stage 2 cooling.

- f. Single Stage Manual Changeover Programmable 5/2 Day (ATP11N01)

Thermostat shall be 5 day/2 day programmable (with up to 4 set points per day), single stage (1H/1C), manual changeover with HEAT-OFF-COOL system settings and fan ON-AUTO settings. Thermostat shall have an LCD display with temperature, set-point(s), mode, and status indication. The temperature indication shall be selectable for °F or °C. The thermostat shall provide permanent memory of set-point(s) without batteries. Thermostat shall provide convenient override feature to temporarily change set point.

- g. Multistage Automatic or Manual Changeover Programmable 5/2 Day (ATP21U01)

Thermostat shall be 5 day/2 day programmable (with up to 4 set points per day), multi-stage (2H/1C), automatic or manual

ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateMaster's Customer Service Department at 1-405-745-6000 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products. The latest version of this document is available at [climatemaster.com](http://climatemaster.com).

## Genesis Standard (GR) Series 60Hz Engineering Specifications Rev.: 08/21/08 Page 7

changeover with HEAT-OFF-COOL-AUTO system settings and fan ON-AUTO settings. Thermostat shall have an LCD display with temperature, set-point(s), mode, and status indication. The temperature indication shall be selectable for °F or °C. The thermostat shall provide permanent memory of set-point(s) without batteries. Thermostat shall provide convenient override feature to temporarily change set point.

**h. Multistage Automatic or Manual Changeover Programmable 7 Day (ATP32U01)**

Thermostat shall be 7 day programmable (with up to 4 set points per day), multi-stage (3H/2C), automatic or manual changeover with HEAT-OFF-COOL-AUTO system settings and fan ON-AUTO settings. Thermostat shall have a blue backlit dot matrix LCD display with temperature, set-points, mode, and status indication. The temperature indication shall be selectable for °F or °C. Time display shall be selectable for 12 or 24 hour clock. Fault identification shall be provided (when used with ClimateMaster CXM or DXM controls) to simplify troubleshooting by providing specific unit fault at the thermostat with red backlit LCD during unit lockout. The thermostat shall provide permanent memory of set-points without batteries. Thermostat shall provide heating set-point range limit, cooling set-point range limit, temperature display offset, keypad lockout, dead-band range setting, and inter-stage differential settings. Thermostat shall provide progressive recovery to anticipate time required to bring space temperature to the next programmed event. Thermostat shall provide an installer setup for configuring options and for setup of servicing contractor name and contact information. Thermostat shall allow the use of an accessory remote and/or outdoor temperature sensor (AST008). Thermostat navigation shall be accomplished via five buttons (up/down/right/left/select) with menu-driven selections for ease of use and programming.

**i. Multistage Automatic or Manual Changeover Programmable 7 Day with Humidity Control (ATP32U02)**

Thermostat shall be 7 day programmable (with up to 4 set points per day), multi-stage (3H/2C), automatic or manual changeover with HEAT-OFF-COOL-AUTO system settings and fan ON-AUTO settings. Separate dehumidification and humidification set points shall be configurable for discreet outputs to a dehumidification option and/or an external humidifier. Installer configuration mode shall allow thermostat dehumidification mode to operate with ClimaDry reheat or with ECM fan dehumidification mode via settings changes. Thermostat shall have a blue backlit dot matrix LCD display with temperature, relative humidity, set-points, mode, and status indication. The temperature indication shall be selectable for °F or °C. Time display shall be selectable for 12 or 24 hour clock. Fault identification shall be provided (when used with ClimateMaster CXM or DXM controls) to simplify troubleshooting by providing specific unit fault at the thermostat with red backlit LCD during unit lockout. The thermostat shall provide permanent memory of set-points without batteries. Thermostat shall provide heating set-point range limit, cooling set-point range limit, temperature display offset, keypad lockout, dead-band range setting, and inter-stage differential settings. Thermostat shall provide progressive recovery to anticipate time required to bring space temperature to the next programmed event. Thermostat shall provide an installer setup for configuring options and for setup of servicing contractor name and contact information. Thermostat shall allow the use of an accessory remote and/or outdoor temperature sensor (AST008). Thermostat navigation shall be accomplished via five buttons (up/down/right/left/select) with menu-driven selections for ease of use and programming.

**DDC Sensors:**

ClimateMaster wall mounted DDC sensor to monitor room temperature and interfaces with optional interface system described above. Several types as described below:

- a. Sensor only with no display (LON and MPC).
- b. Sensor with override (LON only).
- c. Sensor with setpoint and adjustment override (MPC only).
- d. Sensor with setpoint and adjustment override, LCD display, status/fault indication (LON and MPC).

# GR Series 60Hz - R22 Submittal Data Eng/I-P



## Revision History

Date:	Item:	Action:
05/26/09	Stand-Alone and All Products Guide Submittals	Consolidated
26 Aug, 2008	Physical Data Table	Max Working Pressure Table Added
21 Aug, 2008	Engineering Specifications	Verbiage Updated
12 June, 2008	Wiring Diagram Matrix	ETL Information Added
30 May, 2008	MWV Pressure Drop Data	Updated
16 May, 2008	Electrical Data Table	Asterisks Added
17 Sept, 2007	Miscellaneous	Removed various references to GRV006.
18 April, 2007	Blower Data	Updated Blower Data
18 April, 2007	Table of Contents	Added Table of Contents
18 April, 2007	Specifications	Updated Specifications for new Safety Agency
16 Nov, 2006	Dimensional Data	Updated dimensional data to new format
16 Nov, 2006	Performance Data/Blower Data	Added new rated voltage note
19 July, 2006	Specifications	Updated thermostat offering
19 July, 2006	Wiring Diagram	Added pressure switch for motorized water valve option
19 July, 2006	Electrical Data	Added secondary loop pump, 048 high static data, and fixed several model compressor RLA and LRA data
19 July, 2006	Performance Data	Added low temperature selection notes
23 Dec, 2005	Motorized Valves	Added Cv, MOPD, and WPD data
30 Nov, 2005	Tables	Updated all tables to new format
30 Nov, 2005	Dimensional Data	Added new unit drawings, horizontal corner weights, and installation notes
30 Nov, 2005	Physical Data	Added Coax volumes
18 Aug, 2005	Model Nomenclature	Added note for secondary pump availability in 575V units
18 Aug, 2005	Specifications	Updated CXM verbiage; Added discharge muffler to UltraQuiet option
18 Aug, 2005	Correction Factors	Changed "Nominal" to "Rated"; removed CFM/ton column and associated note
18 Aug, 2005	Added Change Log	